


XCA130_E 全地面起重机 / All Terrain Crane

技术规格书


Technical specifications



130 t



62 m



92.5 m




2024年10月第12版

12th edition, October 2024

目录
Contents

尺寸参数 Dimensions	5
技术规格 Technical specifications	6-9
重量/作业速度 Weight / Working speeds	10-11
平衡重 Counterweight	12
运输部件尺寸 Dimensions of parts to be transported	13-14
臂架组合方案 Boom / Jib combinations	15-16
主臂 Boom	17-23
副臂 Jib	24-31
符号标识 Description of symbols	32
主要技术参数表 Table of main technical parameters	33-34
注意事项 Notes	35

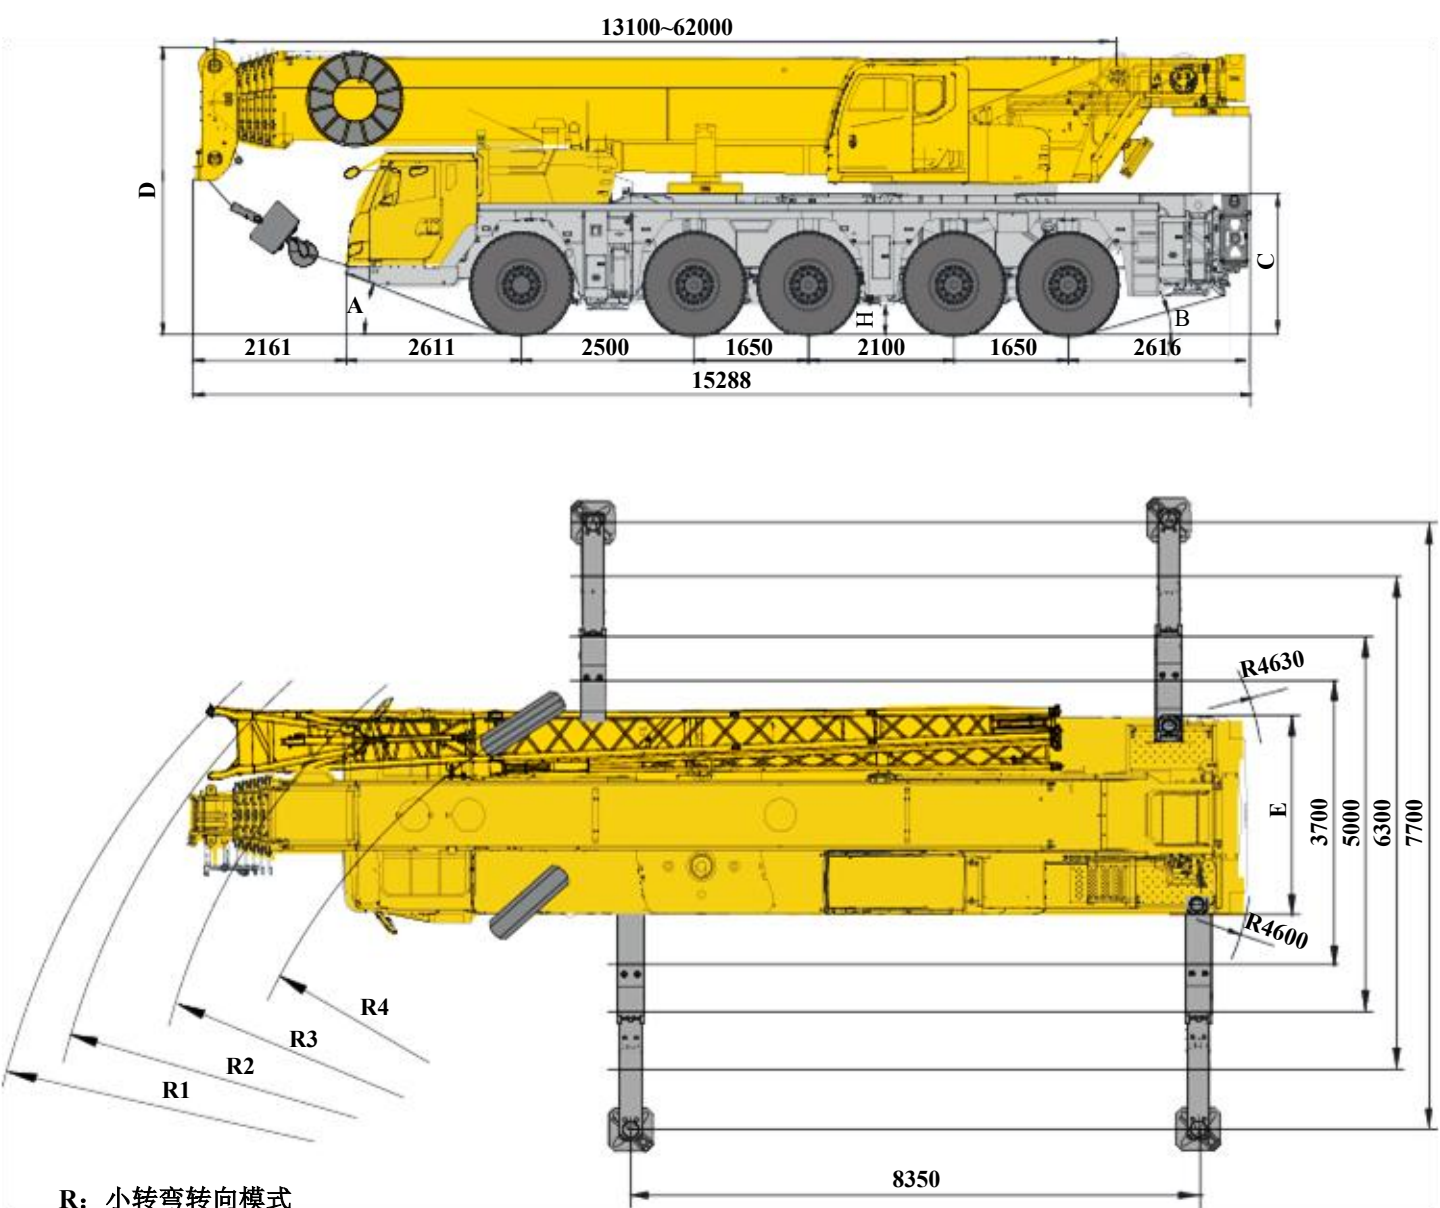尺寸参数
Dimensions



R: 小转弯转向模式
All-wheel steering mode



	A	B	C	D	E	R1	R2	R3	R4	H
385/95 R 25 (14.00 R 25)	18°	14°	1911mm	3950mm	2750mm	12150mm	11650mm	10600mm	9000mm	330mm
445/95R25 (16.00R25)	19°	15°	1961mm	4000mm	2750mm	12150mm	11650mm	10600mm	9000mm	380mm
525/80R25 (20.5R25)	19°	15°	1961mm	4000mm	2850mm	12150mm	11650mm	10600mm	9000mm	380mm

注：表中525/80R25（20.5R25）轮胎对应的参数仅用于提供技术参考，WVTA认证状态无525/80R25（20.5R25）轮胎配置。
Note: parameters for tire of 525/80R25（20.5R25）are only for technical reference. There is no 525/80R25（20.5R25）configuration for WVTA approval.

技术规格

Technical specifications

	底盘	配置		
车架	采用高承载能力的箱型结构，选用高强度钢材，运用有限元分析方法进行全工况模拟分析计算，制造过程高标准全流程检测，重点部位全覆盖探伤，保证承载过程中强度和稳定性的高度可靠。	●	制动	行车制动：脚踏板操纵的双回路气压制动。第一回路作用于3、4、5轴车轮上，第二回路作用于1、2轴车轮上。 驻车制动：放气制动，作用于2、4、5轴车轮上，通过各轴上的弹簧储能气室起作用。 辅助制动：发动机缓速制动、变速箱缓速制动。
支腿	H形支腿，水平支腿为两级伸缩，带推拉式支脚盘，4种伸缩作业位置（全伸、3/4伸，1/2伸，1/4伸），满足多种作业工况需求。 支腿操纵面板CAN总线控制，位于底盘两侧。 支脚盘尺寸：φ495mm。 最大起重量时支腿反力：868kN。	●	电涡流缓速器。	●
发动机	六缸、柴油、戴姆勒公司OM471LA，额定功率/转速： 360kw/1700rpm (EU Stage IV)； 360kw/1600rpm(EU Stage V)。 最大输出扭矩/转速： 2300N.m/1300rpm(EU Stage IV)； 2400N.m/1300rpm(EU Stage V)。 排放标准： EU Stage IV/ EU Stage V /EPA Tier 4F。 燃油箱容积：460L。 发动机低温冷启动装置。	●	转向	1、2轴机械转向，3、4、5轴电液比例转向。
			驾驶室	新型复合结构全宽驾驶室，全封闭、装备豪华舒适。采用优越的密封性、防腐蚀性和防震设计；内置配备电动升降器的安全玻璃、气悬浮可调式座椅、电动及电加热后视镜、可调节高度及角度方向盘、大屏幕彩色液晶显示器、7寸中控屏等；新型组合式中控台布局安全合理，采用圆弧造型，体现人性化的设计。标配冷暖一体式空调。
			驾驶室旋转报警灯。	●
			电气系统	直流24伏特，串联12伏特的电池组2个。发电机：28伏特-180安培。
			工具箱	随机备用箱。
变速箱	匹配原装进口德国ZF AMT自动变速箱，12个前进档，2个倒档，带缓速器。	●		
车桥	5桥底盘，采用断开式车桥，2、3、4、5桥驱动，全桥转向。	●		
悬挂	采用先进的独立悬架技术，左右轮胎相互独立运动，提升驾乘平顺性；油气悬架，减振效果好，具有自动调平功能。 可调节底盘离地高度，主减速器固定于车架，可随车架上下升降，大大提高车辆的通过性； 悬挂油缸行程为±150mm。	●		
轮胎	385/95R25(14.00R25)。	○		
	445/95R25(16.00R25)。	●		
	525/80R25(20.5R25)。	○		

技术规格

Technical specifications

	上车		配置
结构	徐工设计、制造，高强度钢材制造。		●
液压系统	下车发动机驱动变量柱塞泵和齿轮泵用于起升、变幅、伸缩、回转及辅助系统；电控多路换向阀；风冷式液压油散热器。		●
操纵方式	先导电比例操纵，无级调速，由左右2个操纵手柄控制起重机的主要动作。		●
	便捷无线遥控装置，实现作业准备工作。		●
起升机构	液压控制调速，由液压马达通过行星齿轮减速器驱动，内置常闭式制动器并带有平衡阀，装有绳槽卷筒。	主卷	●
		副卷	○
回转机构	单排四点接触球外齿式回转支承，由液压马达通过行星齿轮减速器驱动，内置常闭式制动器，可连续回转360°，具有动力控制或自由滑转的功能，可无级调速。		●
操纵室	新型钢制操纵室，密封性和防腐性好，安全舒适，全封闭，装有无视野死角的前景窗、安全玻璃，车窗装有遮阳板、推拉式车门，操纵员座椅靠背可倾斜定位，操纵杆安装在座椅两侧的扶手上。带推拉踏板，方便人员进出。前窗、顶窗装有雨刮器。操纵室内采用人机交互系统控制面板。操纵室可向上翻转约20°。		●
安全装置	液压平衡阀；液压溢流阀；液压双向锁；力矩限制器；三圈保护器；起升高度限位器；风速仪；卷扬监视装置。		●
组合配重	总重44.5t，有3.6t、6.2t、9t、15.7t、20.6t、25.4t、30.1t、44.5t共8个配重组合方式。		●

集中润滑系统	电脑编程控制，集中润滑点为回转支承、主副起升机构轴承座、变幅油缸上下铰点、操纵室翻转油缸铰点、起重臂后铰点。	●
吊钩	11t吊钩。	●
	25吨吊钩。	●
	60t吊钩。	●
	90t吊钩。	●
	130t吊钩。	○

	臂架系统	配置
主臂	6节，椭圆形截面的筒形焊接结构，单板式臂头、紧凑式臂尾。单缸插销伸缩机构。主臂长度：13.1m～62m。	●
副臂	由连接架、旋转架和两节桁架结构折叠式副臂组成，具有0°、20°、40°三种安装角，收存于主臂旁。副臂长度：11m、18.5m。	●
	无级变幅。	○
加长节	7m主臂加长节。	○
	7m主臂加长节。	○
独立臂头	2.9m独立臂头。	○
臂端单滑轮	单滑轮，安装在主臂顶端用于单股钢丝绳起重作业，起重性能与主臂相同，但最大起重量不超过7000kg。	●

产品各部件明细如上所述，具体部件明细请参照产品报价单

符号说明：

● —— 表示标准配置；

○ —— 表示选装配置。

技术规格

Technical specifications

	Chassis	Configuration		
Frame	Box structure design with high load-bearing capacity, made of high strength steel. Finite element analysis method is adopted for all OM analysis and calculation. High standard testing is realized for the whole manufacturing process. Flaw detection is applied for the key parts to guarantee the high reliability of strength and stability during the load-bearing process.	●	Tires	385/95R25 (14.00R25). 445/95R25 (16.00R25). 525/80R25 (20.5R25).
Outrigger	H-type outriggers, two-stage telescoping outrigger beams with push-pull outrigger floats. There are four working positions (fully extended, 3/4 extended, half extended and 1/4 extended) to meet different requirements. Outrigger control panels controlled by CAN bus are located at both sides of chassis. Float dimension: φ495 mm. Reaction force of outrigger at max. lifting load: 868kN .	●	Brakes	Service braking: foot pedal operated double-circuit air pressure brake. 1st circuit acts on the wheels of 3rd, 4th and 5th axles; 2nd circuit acts on the wheels of 1st and 2nd axles; Parking brake: air-release brake, which acts on the 2nd, 4th and 5th axles, and gives effect by the spring-loaded air chamber on each axle. Auxiliary brakes: engine retarding brake and transmission retarding brake. Eddy current retarder.
Engine	Daimler AG OM471LA, 6 cylinders, diesel. Rated power/ rotation speed: 360kw /1700 rpm (EU Stage IV); 360kw/1600rpm (EU Stage V). Max. output torque/rotation speed: 2300N.m/1300rpm (EU Stage IV); 2400N.m/1300rpm (EU Stage V). Emission standard: EU Stage IV/ EU Stage V /EPA Tier 4F. Fuel tank capacity: 460L. Engine cold start device.	● ○	Steering	1st and 2nd axles are mechanically steered, 3rd, 4th and 5th axles adopt electric-hydraulic proportional steering system.
Transmission	ZF Germany AMT transmission; 12 forward gears and 2 reverse gears available with retarder.	●	Driver' s cab	New full-dimension enclosed cab, luxury and comfort. It is designed to be leakproof, anti-corrosive and shockproof. It is equipped with safety glass with electrically operated door window lifter, adjustable air-suspension seats, electric heating and adjustable rearview mirrors, steering wheel adjustable in height and angle, large screen liquid crystal display, and 7-inch central control display. New combined central control panel is reasonably arranged with arc shape adopted, presenting user-friendly design concept. HVAC is standard. Beacon light at the driver's cab.
Axles	5-axle chassis with disconnected axles; 2nd, 3rd, 4th and 5th axles for driving, all wheel steering.	●	Electrical system	24V DC, two sets of 12V battery in series. Generator: 28V-180 A
Suspension	Advanced independent suspension technology is adopted, and the tires on left and right side move separately to adapt to the road conditions with improved stability; Hydro-pneumatic suspensions have good shock-absorbing effect and automatic leveling function. The height of chassis above the ground may be adjusted. Main reducer is attached to the frame, which can be lifted or lowered with frame, leading to improved pass ability. The stroke of suspension cylinder is ±150 mm.	●	Work-box	Supplied spare box.

技术规格 Technical specifications




	Superstructure		Configuration
Structure	Designed and manufactured by XCMG, made of high strength steel.		●
Hydraulic system	Variable piston pump and gear pump driven by chassis engine are used for lifting, luffing, telescoping, slewing operations and auxiliary systems; Electric control multi-way valve; Air-cooled hydraulic oil cooler.		●
Operating mode	The electric-proportional pilot operation system is equipped with two levers at left and right sides controlling the main movements of the crane, and stepless speed regulation is available.		●
	Portable wireless remote control device is equipped to realize the preoperational work for setting up the crane.		●
Winch system	Hydraulic control is used for speed regulation. The system is driven by a hydraulic motor through a planetary gear reducer, with a normally closed brake, a counterbalance valve and a grooved drum equipped.	Main winch	●
		Auxiliary winch	○
Slewing system	A single-row, four-point contact-ball external slewing bearing; the system is driven by a hydraulic motor through a planetary gear reducer with constant-closed brake equipped, and can continuously slew 360° . Power control and free slewing function as well as stepless speed regulation are available.		●
Operator's cab	New fully-enclosed steel cab has better sealing and anti-corrosive properties. It is equipped with a full-view windshield. Safety glass and sun shield are used for windows. The cab features a new ergonomic seat design with backrest adjustment and armrests with levers fitted. A sliding door and a pull-out step are available to make it easy and safe as access and egress the cab. Wipers are fitted for the windshield and roof window. Control panel with man-machine interactive system is used in operator's cab. The cab can be tilted up to 20° .		●
Safety device	Hydraulic counterbalance valve; hydraulic relief valve; hydraulic double-way lock; LMI; lowering limiter; anti-two block; anemometer; winch monitor.		●
Combined counterweight	Total weight is 44.5t. 8 counterweight combinations of 3.6 t, 6.2 t, 9 t, 15.7 t, 20.6 t, 25.4 t, 30.1 t and 44.5 t are available.		●

Centralized lubrication system	Controlled by computer program; lubrication points are at slewing bearing, bearing pedestals of main winch and auxiliary winch, upper and lower pivots of luffing cylinder, pivot of tilting cylinder and rear pivot of boom.	●
Hook block	11t Hook block.	●
	25t Hook block.	●
	60t Hook block.	●
	90t Hook block.	●
	130t Hook block.	○

	Boom and jib system	Configuration
Boom	6-section boom with oval profile , welded structure with single-plate boom head and compact boom tail. Single-cylinder pinning telescoping system, Boom length: 13.1m~62m.	●
Jib	The jib consists of a connecting bracket, an offsetting bracket and two lattice sections. Three offset angles of 0° , 20° and 40° are available. It is stowed along the side of the boom. Jib length: 11m, 18.5m.	●
	Stepless luffing jib	○
Extension	7m Boom extension.	○
	7m Boom extension.	○
Independent jib head	Independent jib head of 2.9m	○
Auxiliary sheave	Fitted at boom head, used for single line operation. Its lifting performance is the same as that for boom, but the maximum lifting load does not exceed 7000kg.	●

Other items of equipment available on request.
Symbol explanation:
 ● — Standard configuration;
 ○ — Optional configuration.

重量
Weight

							总重量 Total weight	整机宽度 Overall Width
12	10×8×10	445/95 R25	11 t	6.2	18.5 m	√	60t	2750
12	10×8×10	385/95 R25	25 t	9	×	×	60t	2750
16.5	10×8×10	445/95 R25	90 t	25.4	18.5 m	√	82.5t	2750



吊钩最大吊重量 Max. lifting capacity of hook block	倍率 Parts of line	产品额定吊重量 Rated lifting capacity	吊钩重量 Weight (kg)	吊钩尺寸 Dimensions (mm)	备注 Remarks
130t	14	101t	1367	1907×760×848	双钩 Double hooks
90t	10	83t	950	1660.5×630×611	双钩 Double hooks
60t	7	58t	636	1456×630×350	双钩 Double hooks
25t	3	25t	417	1439×558×329	单钩 Single hook
11t	1	8.9t	296	744×440×440	单钩 Single hook

作业速度
Working speeds





385/95 R 25 (14.00 R 25)	1 ~ 80	60%
445/95 R 25 (16.00 R 25)	1~85	60%
525/80R25(20.5R25)		



作业机构 Drive	作业速度 Working speed	最大单绳拉力 Max. single line pull	钢丝绳直径/长度 Rope diameter/ length
	0-130 m/min, 单绳, 第四层 m/min, single line, 4th layer	87kN	20 mm/265 m
	0-130 m/min, 单绳, 第四层 m/min, single line, 4th layer	87 kN	20 mm/205 m
	0-1.65 r/min		
	从-0.5°抬起至82°约65s Approx. 65 s for boom luffing up from -0.5° to 82°		
	从13.1m伸出至62m约630s Approx. 630 s for boom extending from 13.1 m to 62 m		

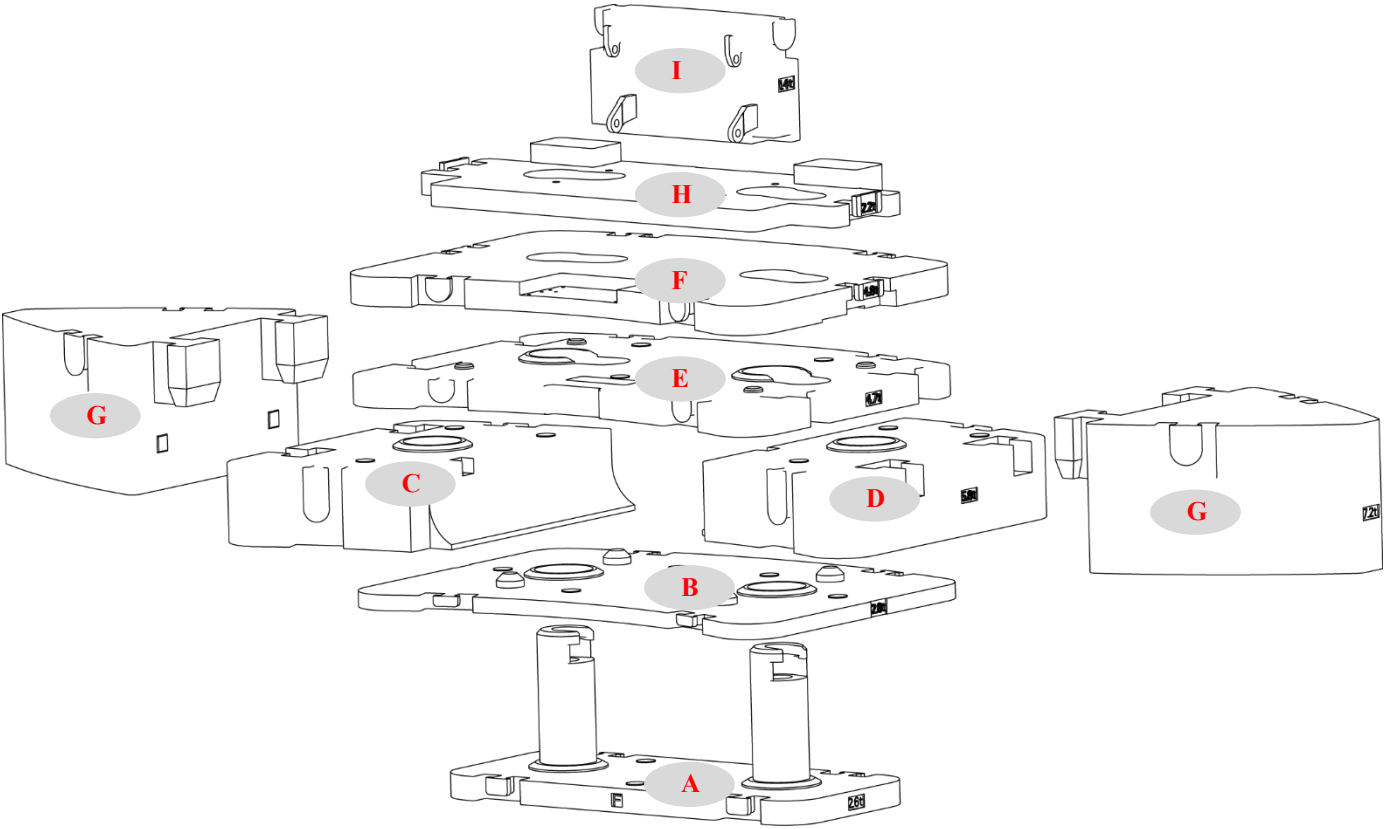平衡重
Counterweight




平衡重 Counterweight	A	B	C	D	E	F	G	H	I
尺寸 (长×宽×高) mm Dimensions (L×W×H) (mm)	2380×1040 ×868	2740×2026 ×154	1270×2026 ×457	1270×2026 ×457	2740×2026 ×186	2740×2026 ×157	1602×1489 ×797	2740×1170 ×215	1200×384× 650
重量 t Weight (t)	2.6	2.8	5.8	5.8	4.7	4.8	7.2	2.2	1.4


工况模式 Working mode	44.5t	30.1t	25.4t	20.6t	15.7t	9t	6.2t	3.6t
组合形式 Combinations	I+H+A+B+ C+D+E+F +G×2	I+H+A+B+ C+D+E+F	I+H+A+B+ C+D+F	I+H+A+B+ C+D	I+H+A+E+ F	I+H+A+B	I+H+A	I+H

运输部件尺寸
Dimensions of parts to be transported

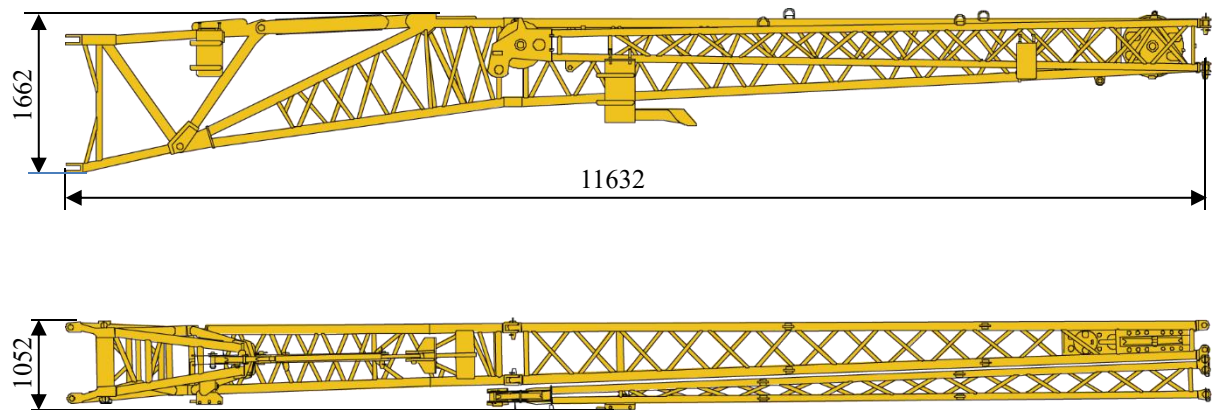
副臂及支架 2200 kg
Jib and the bracket 2200 kg




主臂加长节 618 kg
Boom extension 618 kg

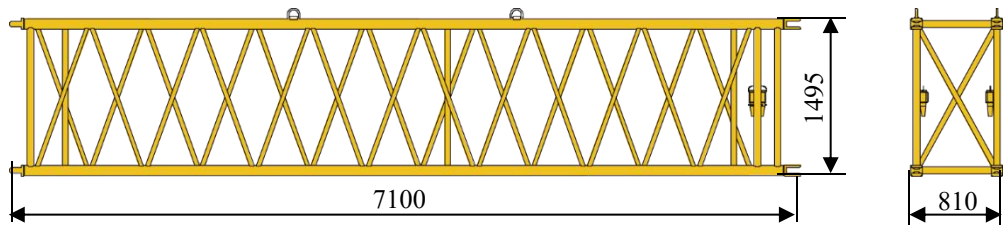

独立臂头 473 kg
Independent jib head 473 kg

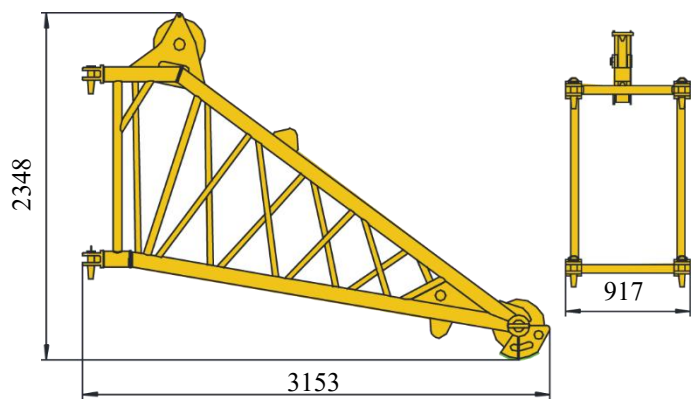


臂端单滑轮 60 kg
Auxiliary sheave 60 kg

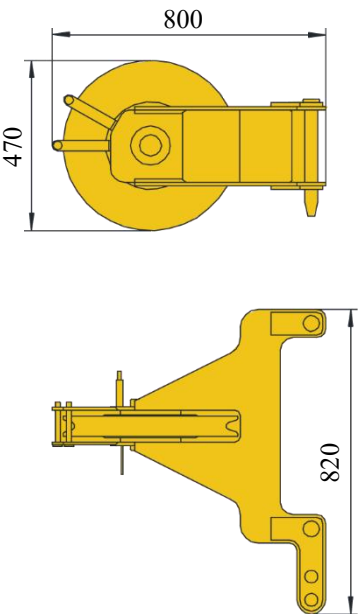

运输部件尺寸
Dimensions of parts to be transported

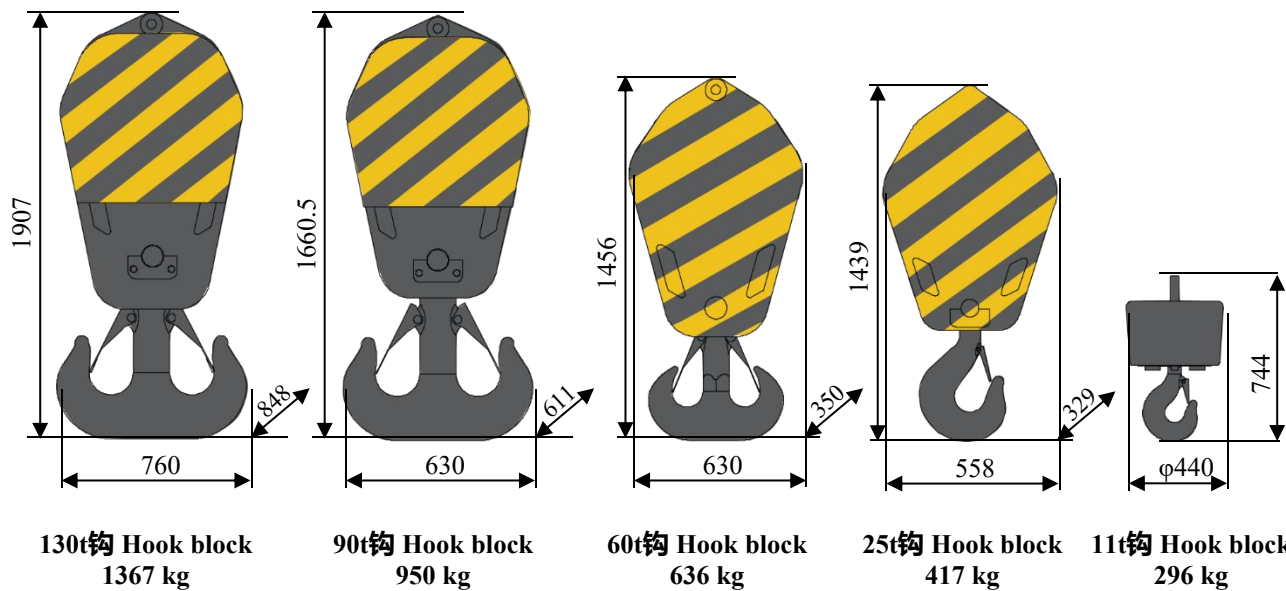
起重钩 3666 kg
Hook blocks 3666 kg



副起升机构 (含钢丝绳) 1409 kg
Auxiliary winch (rope included) 1409 kg


胶管卷筒 280 kg
Hose reel 280 kg

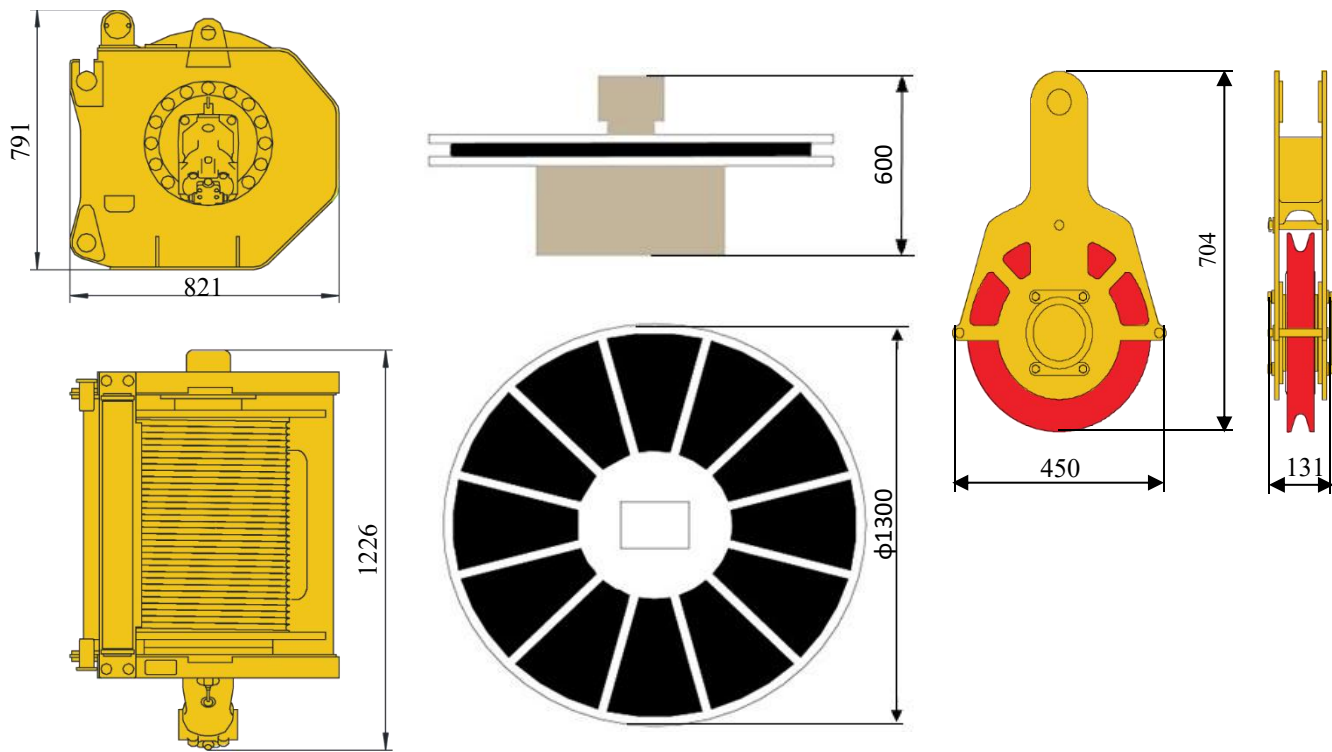附加滑轮 42 kg
Additional sheave block 42 kg




臂架组合方案

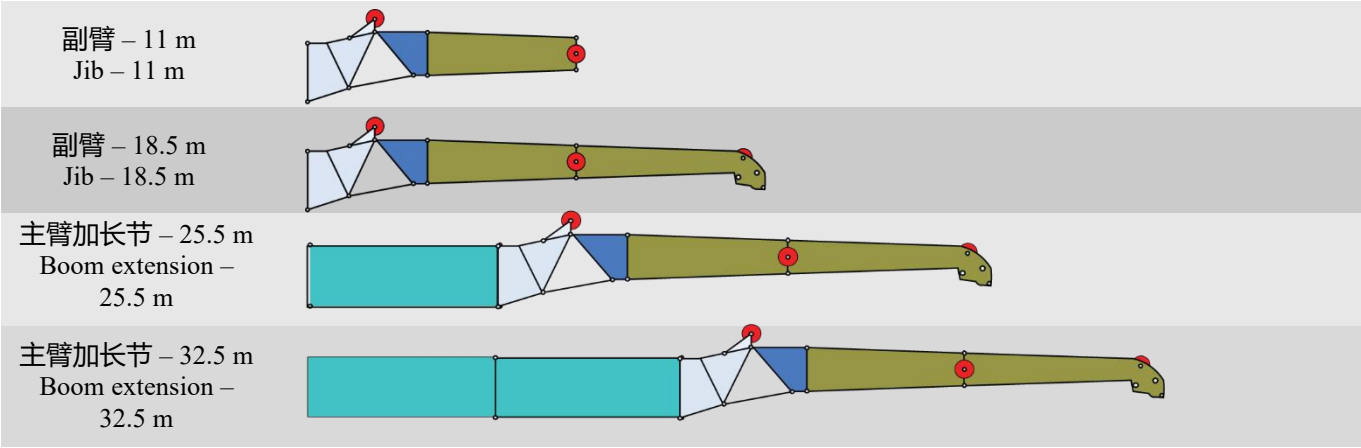Boom / Jib combinations




部件 Component	结构形式 Structure	尺寸 (长×宽×高) mm Dimensions (L×W×H) (mm)	重量 kg Weight (kg)
连接架 Connecting bracket		2064×810×1976	360
旋转架 Offsetting bracket		3435×675×1320	375
主臂加长节 Boom extension		7100*810*1495	618
一节副臂总成 First jib section assembly		7080×610×965	600
二节副臂总成 Second jib section assembly		7360×416×587	360

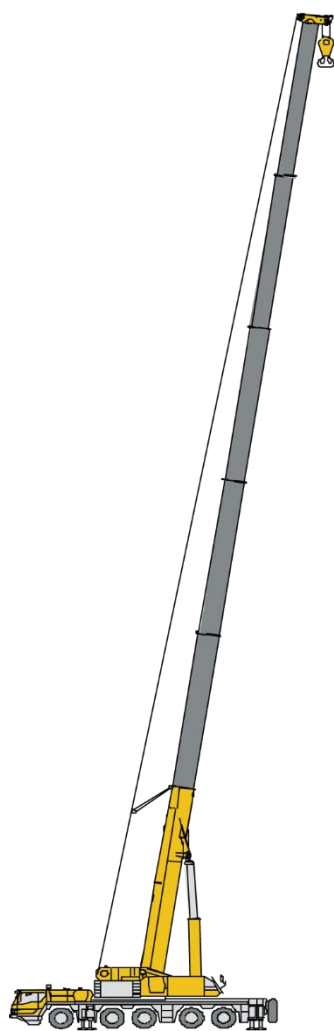臂架组合方案
Boom / Jib combinations




主臂
Telescopic boom

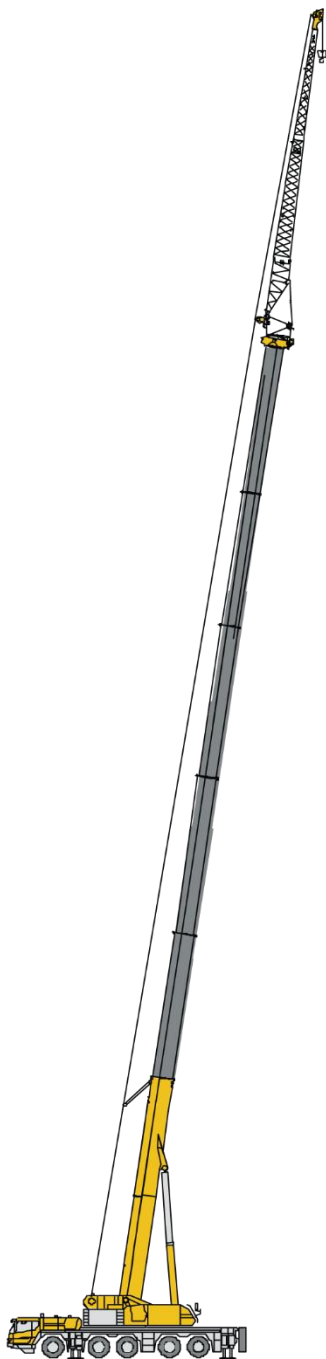T: 13.1~62m




副臂
Jib

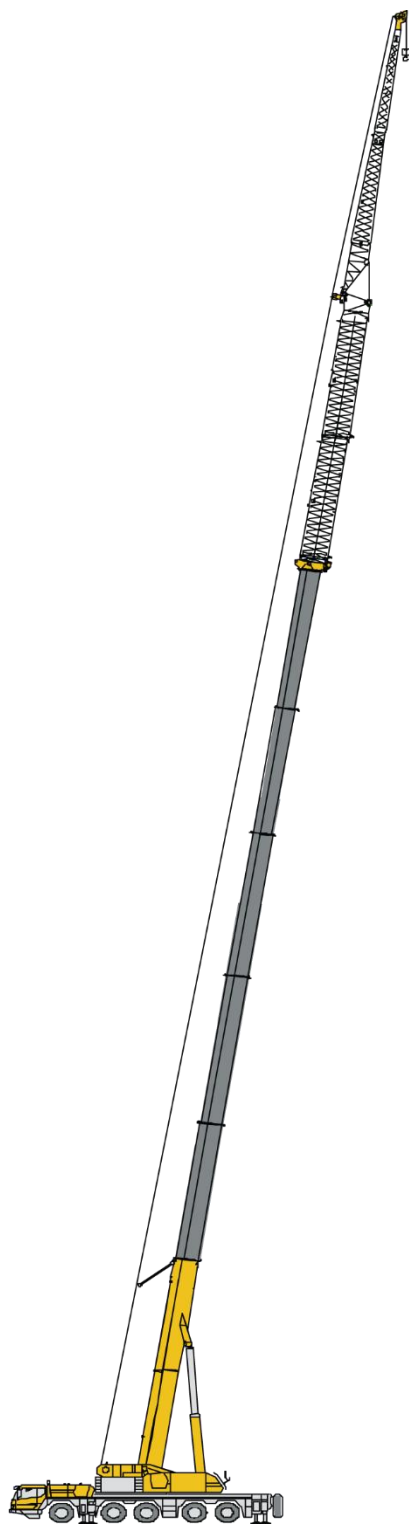T: 40.1~62m
J: 11~18.5 m



主臂加长节
Telescopic boom extension

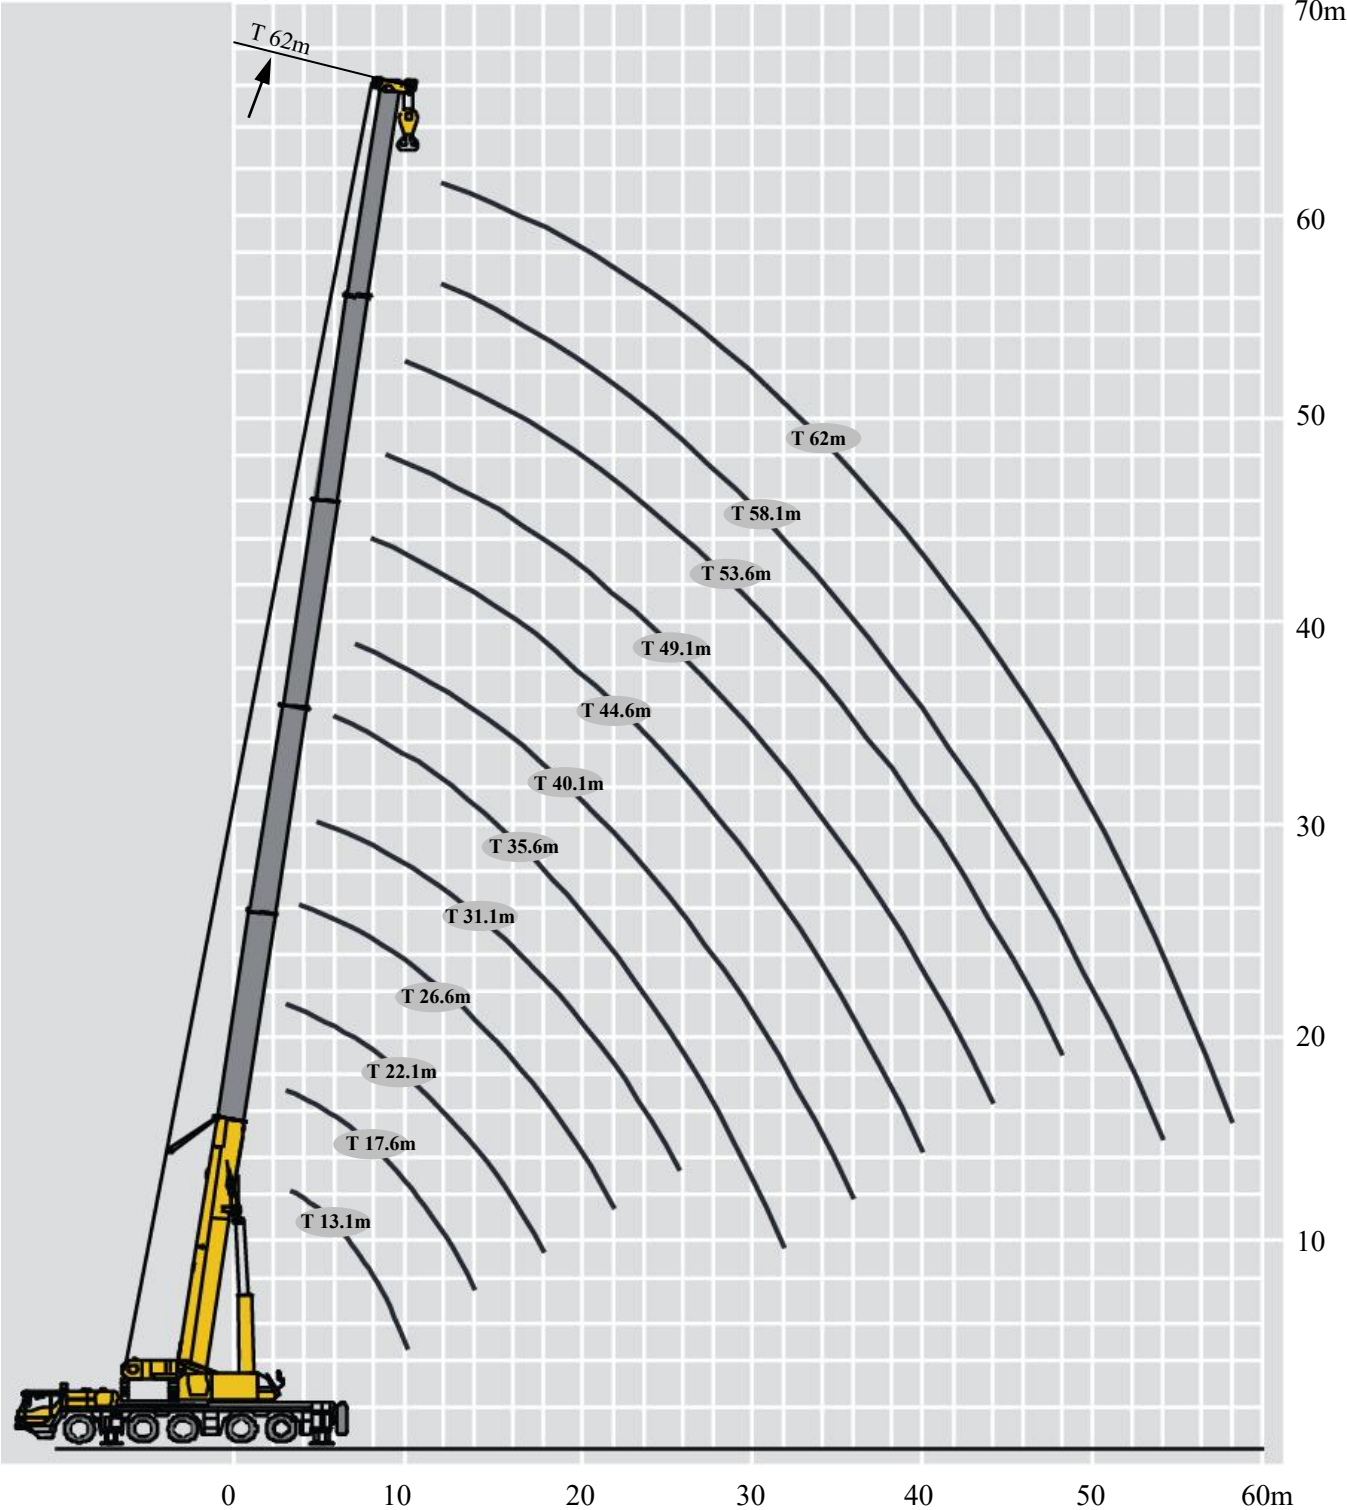T: 58.1~62m
I: 14m
J: 11~18.5m



起重性能表
Load charts

T 13.1~62m

  EN 											
	13.1	17.6m	17.6m	17.6m	22.1m	22.1m	22.1m	26.6m	26.6m	26.6m	
3	130.0*	83.0	83.0	58.0	83.0	83.0	61.7				3
3.5	101.0	83.0	83.0	54.8	83.0	83.0	59.0				3.5
4	93.0	83.0	83.0	52.0	83.0	83.0	56.3	67.0	67.0	58.8	4
4.5	86.0	83.0	83.0	49.6	82.0	82.0	53.7	67.0	67.0	56.6	4.5
5	81.0	78.0	79.0	47.3	76.0	77.0	51.5	67.0	67.0	54.4	5
6	71.0	69.0	69.0	43.4	67.0	68.0	47.5	66.0	66.5	50.7	6
7	62.0	61.0	62.0	40.0	60.0	61.0	44.4	59.0	59.0	47.4	7
8	55.0	55.0	56.0	37.2	54.0	55.0	41.6	53.0	54.0	44.7	8
9	47.0	50.0	50.0	34.9	49.0	50.0	38.7	48.0	49.0	42.1	9
10	38.0	45.0	45.6	32.6	44.0	45.0	35.9	44.0	45.0	39.9	10
12		36.0	36.8	29.3	36.0	37.0	30.9	36.7	37.1	35.2	12
14		27.0	27.0	26.8	29.0	30.2	27.2	29.8	30.3	31.3	14
16					23.2	24.3	24.4	24.0	24.5	26.4	16
18					19.0	20.1	21.8	19.8	20.3	22.1	18
20								16.5	17.0	18.8	20
22								14.0	14.5	16.2	22
组合 Code	00000	01000	00100	00001	11000	01100	00011	11100	02100	00111	组合 Code

										
	31.1m	31.1m	31.1m	35.6m	35.6m	35.6m	40.1m	40.1m	40.1m	
5	58.0	56.3	48.1							5
6	58.0	52.9	43.6	50.0	50.0	49.2				6
7	58.0	49.7	39.6	50.0	50.0	45.4	42.0	42.0	32.0	7
8	53.0	47.0	35.8	50.0	48.8	41.8	42.0	41.8	30.0	8
9	48.0	44.8	32.9	46.7	46.3	38.5	42.0	39.1	28.3	9
10	44.0	42.6	30.6	43.0	44.0	35.0	40.3	35.3	26.8	10
12	37.4	38.6	26.6	37.0	38.0	30.0	34.0	31.0	23.9	12
14	30.7	32.1	23.6	30.3	31.5	26.6	29.6	27.8	21.6	14
16	24.8	26.2	21.0	24.5	25.7	23.7	25.3	25.2	19.8	16
18	20.6	21.9	18.9	20.3	21.4	21.4	21.0	21.3	18.1	18
20	17.4	18.6	17.2	17.0	18.1	18.5	17.8	18.1	16.8	20
22	14.8	16.1	15.9	14.5	15.6	15.9	15.2	15.5	15.6	22
24	12.8	14.0	14.3	12.5	13.5	13.9	13.2	13.5	14.1	24
26	11.1	12.3	12.6	10.8	11.8	12.2	11.5	11.8	12.4	26
28				9.3	10.4	10.7	10.1	10.4	11.0	28
30				8.1	9.2	9.5	8.8	9.1	9.8	30
32				7.0	8.0	8.0	7.8	8.1	8.7	32
34							6.9	7.2	7.8	34
36							6.1	6.4	7.0	36
组合 Code	11110	01111	00211	21110	11111	02111	21111	12111	11112	组合 Code


起重性能表
Load charts

T 13.1~62m

	44.6m	44.6m	44.6m	49.1m	49.1m	49.1m	53.6m	53.6m	58.1m	62m	
8	32.7	31.7	24.0								
9	32.7	30.9	22.7	25.1	24.2	21.3					9
10	32.9	29.3	21.5	25.1	24.2	20.5	18.7	18.1			10
12	29.7	26.5	19.3	25.1	22.9	18.8	17.8	18.1	14.7	11.8	12
14	26.7	24.0	17.5	22.6	21.0	17.4	16.8	18.1	14.8	11.8	14
16	23.5	21.7	15.9	20.1	19.0	16.0	15.8	16.7	14.8	11.9	16
18	21.0	19.9	14.6	17.8	17.0	14.8	14.7	14.9	14.2	12.0	18
20	17.8	18.1	13.4	16.1	15.4	13.7	13.9	13.6	12.9	11.7	20
22	15.2	15.7	12.5	14.6	14.0	12.8	12.8	12.3	11.6	10.6	22
24	13.2	13.7	11.6	13.2	12.8	12.0	11.7	11.3	10.5	9.6	24
26	11.5	12.0	10.9	11.7	11.7	11.2	10.7	10.4	9.6	8.8	26
28	10.0	10.5	10.1	10.2	10.8	10.6	9.8	9.6	8.9	8.1	28
30	8.8	9.3	9.6	9.0	9.6	10.0	9.0	8.9	8.2	7.5	30
32	7.8	8.3	9.0	8.0	8.6	9.1	8.3	8.2	7.6	6.8	32
34	6.9	7.4	8.1	7.1	7.7	8.2	7.4	7.7	7.0	6.4	34
36	6.1	6.6	7.3	6.3	6.9	7.4	6.6	7.1	6.5	5.9	36
38	5.4	5.9	6.6	5.6	6.2	6.7	5.9	6.6	6.1	5.5	38
40	4.7	5.2	6.0	4.9	5.5	6.0	5.3	5.9	5.6	5.1	40
42				4.4	5.0	5.5	4.7	5.4	5.1	4.7	42
44				3.9	4.5	5.0	4.2	4.8	4.5	4.3	44
46							3.7	4.4	4.1	4.0	46
48							3.3	3.9	3.6	3.7	48
50									3.3	3.3	50
52									2.9	2.9	52
54									2.6	2.6	54
56										2.3	56
58										1.6	58
组合 Code	22111	12211	11122	22211	12221	11222	22221	12222	22222	33333	组合 Code

起重性能表
Load charts

T 13.1~62m

  EN 											
	13.1	17.6m	17.6m	17.6m	22.1m	22.1m	22.1m	26.6m	26.6m	26.6m	
3	105.0	83.0	83.0	58.0	83.0	83.0	61.7				3
3.5	101.0	83.0	83.0	54.8	83.0	83.0	59.0				3.5
4	93.0	83.0	83.0	52.0	83.0	83.0	56.3	67.0	67.0	58.8	4
4.5	86.0	83.0	83.0	49.6	82.0	82.0	53.7	67.0	67.0	56.6	4.5
5	81.0	78.0	79.0	47.3	76.0	77.0	51.5	67.0	67.0	54.4	5
6	70.6	69.0	69.0	43.4	67.0	68.0	47.5	66.0	66.5	50.7	6
7	59.5	59.5	60.2	40.0	59.3	60.3	44.4	59.0	59.0	47.4	7
8	51.1	51.2	51.8	37.2	51.0	52.0	41.6	51.7	52.1	44.7	8
9	44.3	44.5	45.3	34.9	44.1	45.5	38.7	45.1	45.6	42.1	9
10	36.5	36.7	37.5	32.6	36.4	37.8	35.9	37.4	38.0	39.9	10
12		26.6	27.3	28.4	26.3	27.6	29.5	27.2	27.7	29.8	12
14		20.2	20.9	21.9	20.0	21.2	23.0	20.8	21.3	23.3	14
16					15.4	16.6	18.4	16.3	16.8	18.7	16
18					12.1	13.3	15.1	13.0	13.5	15.4	18
20								10.5	11.0	12.8	20
22								8.5	9.0	10.8	22
组合 Code	00000	01000	00100	00001	11000	01100	00011	11100	02100	00111	组合 Code

										
	31.1m	31.1m	31.1m	35.6m	35.6m	35.6m	40.1m	40.1m	40.1m	
5	58.0	56.3	48.1							5
6	58.0	52.9	43.6	50.0	50.0	49.2				6
7	58.0	49.7	39.6	50.0	50.0	45.4	42.0	42.0	32.0	7
8	52.4	47.0	35.8	50.0	48.8	41.8	42.0	41.8	30.0	8
9	45.9	44.8	32.9	45.6	46.3	38.5	42.0	39.1	28.3	9
10	38.4	40.0	30.6	38.0	39.4	35.0	38.9	35.3	26.8	10
12	28.1	29.6	26.6	27.7	29.0	29.5	28.6	29.0	23.9	12
14	21.7	23.1	23.5	21.3	22.5	22.9	22.1	22.5	21.6	14
16	17.1	18.6	18.9	16.8	18.0	18.4	17.6	18.0	18.7	16
18	13.8	15.2	15.5	13.5	14.7	15.0	14.3	14.6	15.3	18
20	11.3	12.6	13.0	11.0	12.1	12.5	11.7	12.1	12.8	20
22	9.3	10.6	11.0	9.0	10.2	10.5	9.8	10.1	10.8	22
24	7.8	9.0	9.4	7.5	8.6	8.9	8.2	8.5	9.2	24
26	6.5	7.7	8.1	6.2	7.3	7.6	6.9	7.2	7.9	26
28				5.1	6.2	6.5	5.8	6.1	6.8	28
30				4.2	5.3	5.6	4.9	5.2	5.9	30
32				3.4	4.5	4.8	4.1	4.4	5.1	32
34							3.5	3.8	4.4	34
36							2.9	3.2	3.8	36
组合 Code	11110	01111	00211	21110	11111	02111	21111	12111	11112	组合 Code



起重性能表
Load charts


T 13.1~62m

	44.6m	44.6m	44.6m	49.1m	49.1m	49.1m	53.6m	53.6m	58.1m	62m	
8	32.7	31.7	24.0								
9	32.7	30.9	22.7	25.1	24.2	21.3					9
10	32.9	29.3	21.5	25.1	24.2	20.5	18.7	18.1			10
12	28.6	26.5	19.3	25.1	22.9	18.8	17.8	18.1	14.7	11.8	12
14	22.1	22.7	17.5	22.3	21.0	17.4	16.8	18.1	14.8	11.8	14
16	17.6	18.2	15.9	17.8	18.6	16.0	15.8	16.7	14.8	11.9	16
18	14.2	14.8	14.6	14.5	15.2	14.8	14.7	14.9	14.2	12.0	18
20	11.7	12.3	13.1	11.9	12.6	13.2	12.3	13.1	12.7	11.7	20
22	9.8	10.3	11.1	10.0	10.6	11.2	10.3	11.1	10.7	10.6	22
24	8.2	8.7	9.5	8.4	9.1	9.6	8.7	9.5	9.1	9.2	24
26	6.9	7.4	8.2	7.1	7.8	8.3	7.4	8.2	7.8	7.9	26
28	5.8	6.3	7.1	6.0	6.7	7.2	6.4	7.1	6.7	6.8	28
30	4.9	5.4	6.2	5.1	5.7	6.3	5.4	6.1	5.8	5.9	30
32	4.1	4.6	5.4	4.3	5.0	5.5	4.7	5.3	5.0	5.1	32
34	3.5	3.9	4.7	3.7	4.3	4.8	4.0	4.7	4.3	4.4	34
36	2.9	3.3	4.1	3.1	3.7	4.2	3.4	4.1	3.7	3.8	36
38	2.3	2.8	3.6	2.5	3.1	3.6	2.8	3.5	3.2	3.3	38
40	1.9	2.3	3.1	2.1	2.7	3.2	2.4	3.0	2.7	2.8	40
42				1.6	2.2	2.7	2.0	2.6	2.3	2.4	42
44				1.3	1.9	2.4	1.6	2.2	1.9	2.0	44
46							1.2	1.9	1.6	1.6	46
48								1.6	1.3	1.3	48
50										1.0	50
组合 Code	22111	12211	11122	22211	12221	11222	22221	12222	22222	33333	组合 Code


起重性能表
Load charts

T 13.1~62m

 13.1-62m  8.35×7.7m  360°  3.6t  EN  											
	13.1m	17.6m	17.6m	17.6m	22.1m	22.1m	22.1m	26.6m	26.6m	26.6m	
3	103.2	83.0	83.0	58.0	83.0	83.0	61.7				3
3.5	92.6	83.0	83.0	54.8	83.0	83.0	59.0				3.5
4	83.9	83.0	83.0	52.0	83.0	83.0	56.3	67.0	67.0	58.8	4
4.5	76.5	76.6	77.1	49.6	76.4	77.2	53.7	67.0	67.0	56.6	4.5
5	70.3	70.3	70.8	47.3	70.1	71.0	51.5	67.0	67.0	54.4	5
6	59.6	59.7	60.3	43.4	59.4	60.5	47.5	60.2	60.6	50.7	6
7	42.3	42.5	43.6	40.0	42.1	43.9	44.4	43.3	44.1	47.0	7
8	31.2	31.5	32.5	34.1	31.0	32.8	35.6	32.2	33.1	36.0	8
9	23.7	23.9	24.8	26.2	23.5	25.2	27.6	24.6	25.3	28.0	9
10	18.5	18.8	19.7	21.0	18.5	20.0	22.2	19.5	20.1	22.6	10
12		12.3	13.1	14.3	12.0	13.4	15.4	13.0	13.6	15.8	12
14		8.4	9.1	10.2	8.2	9.4	11.3	9.0	9.6	11.6	14
16					5.5	6.7	8.6	6.4	6.9	8.9	16
18					3.6	4.8	6.6	4.5	5.0	6.9	18
20								3.0	3.5	5.4	20
22								1.9	2.4	4.2	22
组合 Code	00000	01000	00100	00001	11000	01100	00011	11100	02100	00111	组合 Code






 31.1m  31.1m  31.1m  35.6m  35.6m  35.6m  40.1m  40.1m  40.1m  										
	31.1m	31.1m	31.1m	35.6m	35.6m	35.6m	40.1m	40.1m	40.1m	
5	58.0	56.3	48.1							5
6	58.0	52.9	43.6	50.0	50.0	49.2				6
7	44.6	46.8	39.6	44.1	45.9	45.4	42.0	42.0	32.0	7
8	33.6	35.7	35.8	33.0	34.9	35.5	34.3	34.8	30.0	8
9	25.8	27.7	28.3	25.3	27.0	27.6	26.4	26.9	27.9	9
10	20.6	22.4	22.8	20.1	21.7	22.2	21.2	21.6	22.5	10
12	14.0	15.6	16.0	13.6	15.0	15.4	14.5	14.9	15.7	12
14	9.9	11.4	11.8	9.6	10.9	11.3	10.4	10.8	11.6	14
16	7.3	8.7	9.1	6.9	8.1	8.5	7.7	8.1	8.8	16
18	5.3	6.7	7.1	5.0	6.2	6.5	5.8	6.1	6.8	18
20	3.9	5.2	5.6	3.5	4.7	5.1	4.3	4.6	5.3	20
22	2.7	4.0	4.4	2.4	3.5	3.9	3.2	3.5	4.2	22
24	1.8	3.1	3.4	1.5	2.6	3.0	2.2	2.6	3.2	24
26	1.1	2.3	2.7		1.9	2.2	1.5	1.8	2.5	26
28					1.2	1.6		1.2	1.8	28
30						1.0			1.3	30
组合 Code	11110	01111	00211	21110	11111	02111	21111	12111	11112	组合 Code

	44.6m	44.6m	44.6m	49.1m	49.1m	49.1m	53.6m	53.6m	58.1m	62m	
8	32.7	31.7	24.0								
9	26.4	27.2	22.7	25.1	24.2	21.3					9
10	21.1	21.9	21.5	21.4	22.4	20.5	18.7	18.1			10
12	14.5	15.1	16.1	14.7	15.6	16.2	15.2	16.1	14.7	11.8	12
14	10.4	11.0	12.0	10.7	11.4	12.1	11.1	11.9	11.5	11.6	14
16	7.7	8.3	9.2	7.9	8.7	9.3	8.3	9.1	8.8	8.8	16
18	5.8	6.3	7.2	6.0	6.7	7.3	6.3	7.1	6.8	6.8	18
20	4.3	4.8	5.7	4.5	5.2	5.7	4.9	5.6	5.3	5.3	20
22	3.1	3.7	4.5	3.4	4.0	4.6	3.7	4.4	4.1	4.2	22
24	2.2	2.8	3.5	2.4	3.1	3.6	2.8	3.5	3.2	3.2	24
26	1.5	2.0	2.8	1.7	2.3	2.9	2.0	2.7	2.4	2.5	26
28		1.4	2.1	1.1	1.7	2.2	1.4	2.1	1.8	1.8	28
30			1.6		1.1	1.7		1.5	1.2	1.3	30
32			1.1			1.2		1.1			32
组合 Code	22111	12211	11122	22211	12221	11222	22221	12222	22222	33333	组合 Code

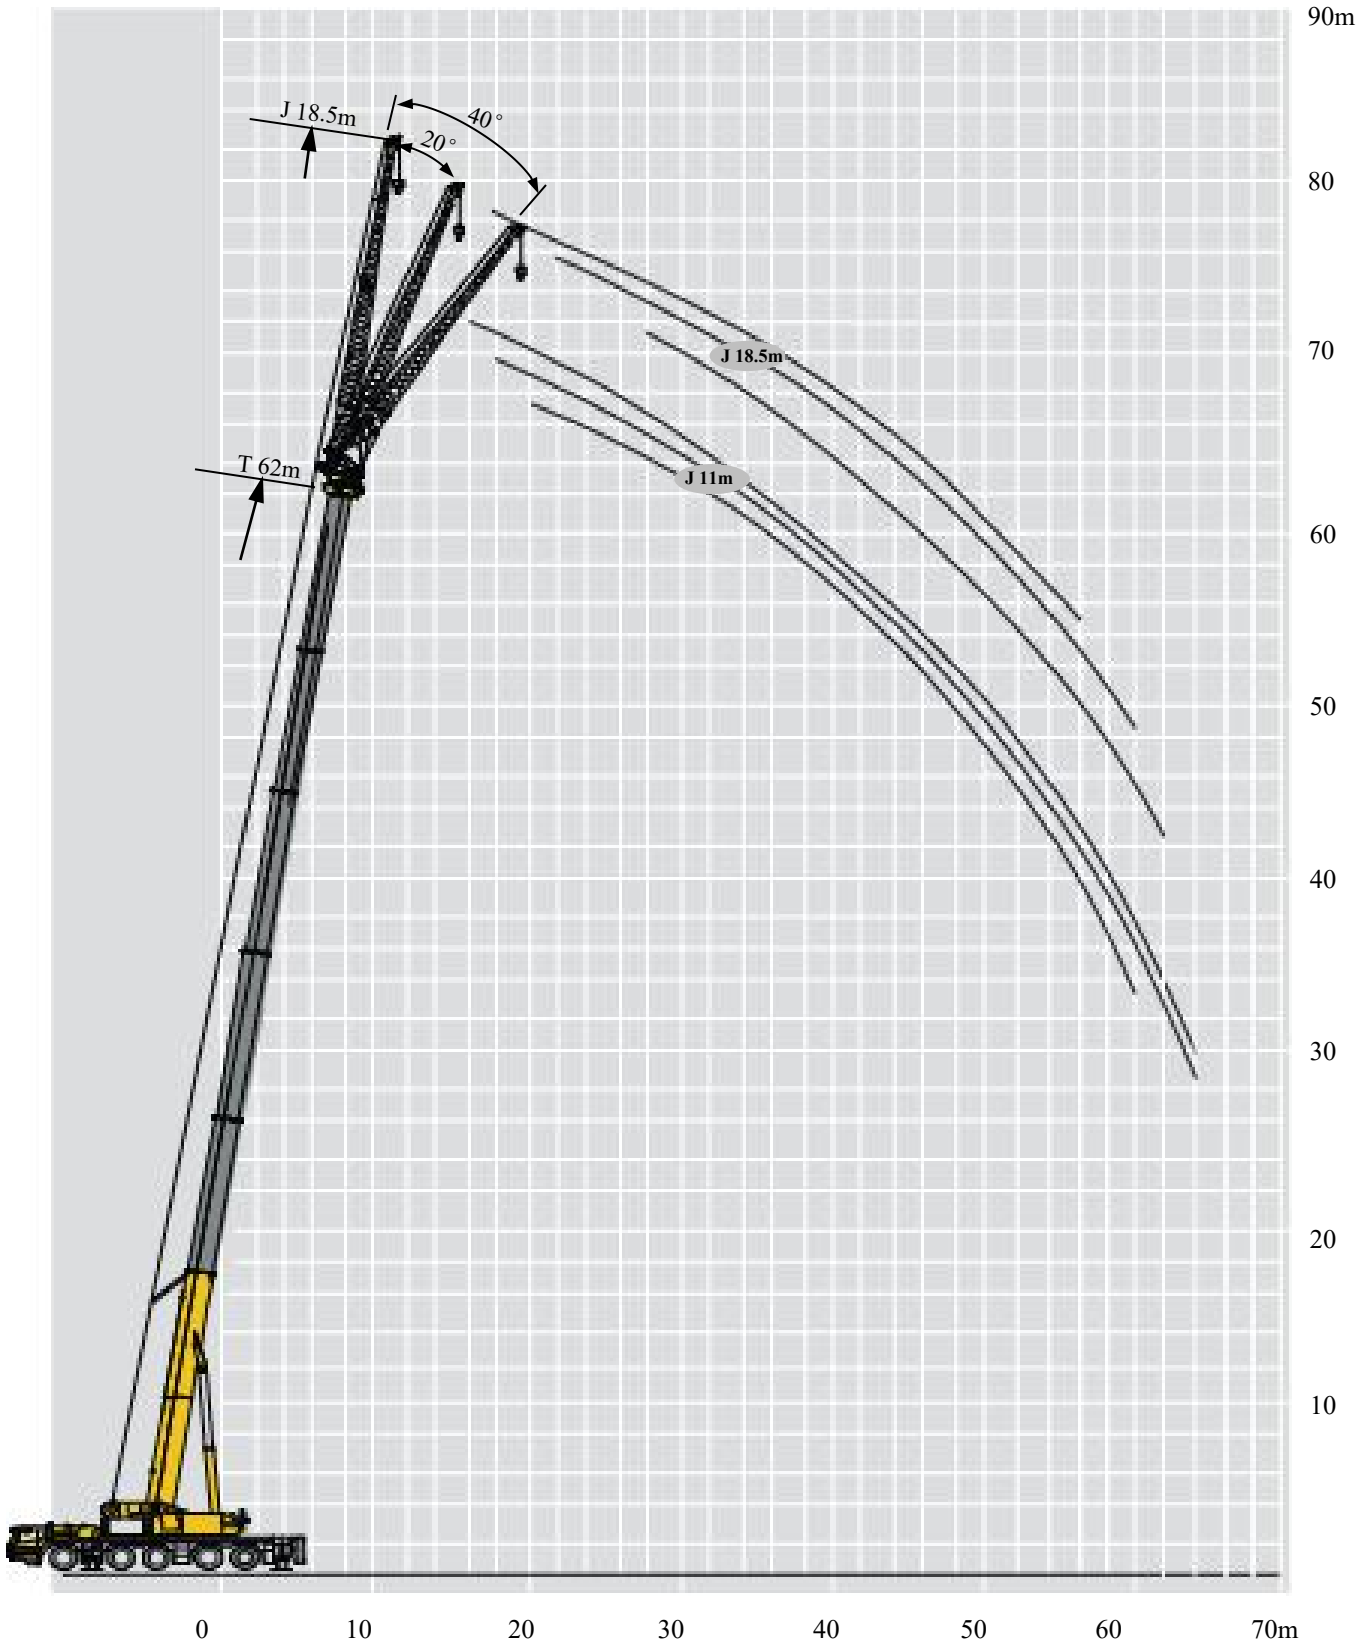





起重性能表
Load charts

J 11m/18.5 m

																					
		13.1m			40.1m			53.6 m			58.1m			62m							
		0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°					
5	17.3																5				
6	17.3	11.6															6				
7	16.5	10.1															7				
8	15.2	9.0															8				
9	14.0	8.6	5.9	13.0													9				
10	12.7	8.1	5.6	12.5													10				
12	11.5	7.1	5.1	12.0	10.0		10.4										12				
14	9.8	6.6	4.9	11.0	9.1		10.4			8.9							14				
16	9.0	6.1	4.7	10.5	8.7	5.6	10.3	9.5		8.7			7.9				16				
18	6.8	5.6	4.6	10.0	8.2	5.4	10.1	8.7	5.5	8.5	8.6		7.9	7.9			18				
20		4.7	4.5	9.5	7.7	5.2	9.9	8.5	5.3	8.4	8.3	5.1	7.9	7.8	5.1		20				
22				9.2	7.4	5.0	9.6	8.0	5.1	8.4	7.9	5.0	7.9	7.7	5.0		22				
24				8.9	7.0	4.9	9.3	7.5	5.0	8.3	7.6	4.9	7.8	7.6	4.9		24				
26				8.6	6.8	4.8	9.3	7.4	4.9	8.3	7.3	4.8	7.8	7.2	4.8		26				
28				8.3	6.4	4.7	8.6	6.9	4.8	7.8	7.0	4.7	7.0	6.7	4.7		28				
30				8.1	6.2	4.5	7.9	6.8	4.7	7.1	6.6	4.6	6.5	6.2	4.5		30				
32				8.0	6.0	4.4	7.3	6.5	4.5	6.5	6.3	4.4	5.9	5.6	4.4		32				
34				7.2	5.7	4.3	6.8	6.3	4.4	6.0	5.7	4.3	5.4	5.4	4.3		34				
36				6.4	5.6	4.2	6.2	6.0	4.3	5.5	5.3	4.2	4.9	4.9	4.2		36				
38				5.7	5.3	4.1	5.7	5.5	4.2	5.0	5.1	4.1	4.6	4.6	4.1		38				
40				5.1	5.2	4.1	5.1	5.2	4.0	4.8	4.7	3.9	4.1	4.1	3.9		40				
42				4.6	4.7	3.9	4.5	4.7	4.0	4.4	4.3	3.9	3.8	3.8	3.8		42				
44					4.2		4.0	4.3	3.9	4.0	4.0	3.8	3.6	3.5	3.5		44				
46							3.6	3.8	3.8	3.7	3.7	3.8	3.3	3.3	3.2		46				
48							3.2	3.4	3.5	3.4	3.5	3.5	3.0	3.0	2.9		48				
50							2.8	3.0	3.0	3.0	3.2	3.3	2.7	2.7	2.8		50				
52							2.4	2.6	2.6	2.6	2.8	2.9	2.5	2.5	2.5		52				
54							2.1	2.3		2.3	2.5	2.5	2.3	2.3	2.4		54				
56							1.8	1.9		2.0	2.2	2.2	2.0	2.1	2.1		56				
58										1.8	1.9		1.7	1.8	1.9		58				
60										1.5	1.6		1.5	1.6	1.6		60				
62													1.2	1.3			62				
64													1.0	1.1			64				
组合 Code	00000			21111			22221			22222			33333			组合 Code					






起重性能表
Load charts


J 11m/18.5 m

  EN 																
13.1m			40.1m			53.6 m			58.1m			62m				
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	
5	7.8															5
6	7.5															6
7	7.4															7
8	7.2															8
9	7.1															9
10	6.9	6.0														10
12	5.9	5.4		5.6												12
14	5.1	4.7		5.5			4.9									14
16	4.6	4.2	2.5	5.4	4.2		4.8			4.5						16
18	4.1	4.1	2.4	5.3	4.1		4.8			4.4			4.0			18
20	3.7	3.8	2.3	5.2	3.8		4.7	4.1		4.4			4.0			20
22	3.4	3.6	2.1	5.1	3.6	2.4	4.7	3.9		4.4	3.9		4.0	3.7		22
24		3.4	2.0	5.1	3.4	2.3	4.6	3.7	2.4	4.3	3.8		3.9	3.5		24
26			1.9	5.1	3.2	2.2	4.5	3.6	2.3	4.3	3.6	2.3	3.8	3.4		26
28				5.0	3.1	2.1	4.5	3.3	2.2	4.3	3.4	2.2	3.7	3.3	2.2	28
30				4.7	3.0	2.0	4.4	3.2	2.1	4.2	3.3	2.1	3.6	3.2	2.1	30
32				4.5	2.9	2.0	4.4	3.1	2.1	4.2	3.2	2.1	3.5	3.1	2.1	32
34				4.2	2.7	1.9	4.3	3.0	2.0	4.1	3.0	2.1	3.4	3.0	2.0	34
36				4.0	2.6	1.9	4.3	2.9	2.0	4.1	2.9	2.0	3.3	2.8	2.0	36
38					2.5	1.9	4.2	2.7	2.0	4.0	2.8	2.0	3.2	2.7	2.0	38
40					2.3	1.9	4.1	2.6	1.9	4.0	2.7	2.0	3.2	2.6	2.0	40
42					2.2	1.8	4.1	2.5	1.9	3.8	2.5	1.9	3.1	2.5	1.9	42
44					2.1	1.8	3.9	2.4	1.9	3.8	2.4	1.9	3.0	2.5	1.9	44
46						1.8	3.7	2.4	1.9	3.6	2.4	1.9	2.9	2.4	1.9	46
48							3.5	2.3	1.8	3.3	2.4	1.9	2.8	2.4	1.9	48
50							3.2	2.2	1.9	3.0	2.3	1.9	2.6	2.4	1.9	50
52								2.1	1.9	2.7	2.3	1.8	2.3	2.3	1.8	52
54								2.1	1.8	2.5	2.2	2.0	2.3	2.2	1.9	54
56									1.9	2.3	2.1	1.8	2.0	2.0	1.9	56
58										2.1	2.0	1.8		1.9	1.8	58
60										1.8	2.0			1.7	1.8	60
62										1.6	1.8				1.5	62
64										1.4	1.5					64
66											1.3					66
68											1.1					68
组合 Code	00000			21111			22221			22222			33333			组合 Code

起重性能表
Load charts



J 11m/18.5 m

	     															
	13.1m			40.1m			53.6 m			58.1m			62m			
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	
5	7.8															5
6	7.5															6
7	7.4															7
8	7.2															8
9	7.1															9
10	6.9	6.0														10
12	5.9	5.4		5.6												12
14	5.1	4.7		5.5			4.9									14
16	4.6	4.2	2.5	5.4	4.2		4.8			4.5						16
18	4.1	4.1	2.4	5.3	4.1		4.8			4.4			4.0			18
20	3.7	3.8	2.3	5.2	3.8		4.7	4.1		4.4			4.0			20
22	3.4	3.6	2.1	4.9	3.6	2.4	4.6	3.9		4.4	3.9		4.0	3.7		22
24		3.4	2.0	3.9	3.4	2.3	3.6	3.7	2.4	3.8	3.8		3.7	3.5		24
26			1.9	3.1	3.2	2.2	2.8	3.6	2.3	3.0	3.6	2.3	2.9	3.4		26
28				2.4	3.1	2.1	2.2	3.2	2.2	2.3	3.3	2.2	2.2	3.2	2.2	28
30				1.8	2.6	2.0	1.6	2.5	2.1	1.7	2.6	2.1	1.7	2.6	2.1	30
32				1.3	2.1	2.0	1.1	1.9	2.1	1.3	2.1	2.1	1.2	2.0	2.1	32
34				0.9	1.6	1.9	0.7	1.4	2.0	0.8	1.6	2.1	0.8	1.5	2.0	34
36				0.5	1.1	1.6		1.0	1.5	0.5	1.2	1.7		1.1	1.7	36
38					0.7	1.1		0.6	1.1		0.8	1.3		0.7	1.2	38
40						0.7			0.7			0.9			0.8	40
42												0.5			0.5	42
组合 Code	00000			21111			22221			22222			33333			组合 Code

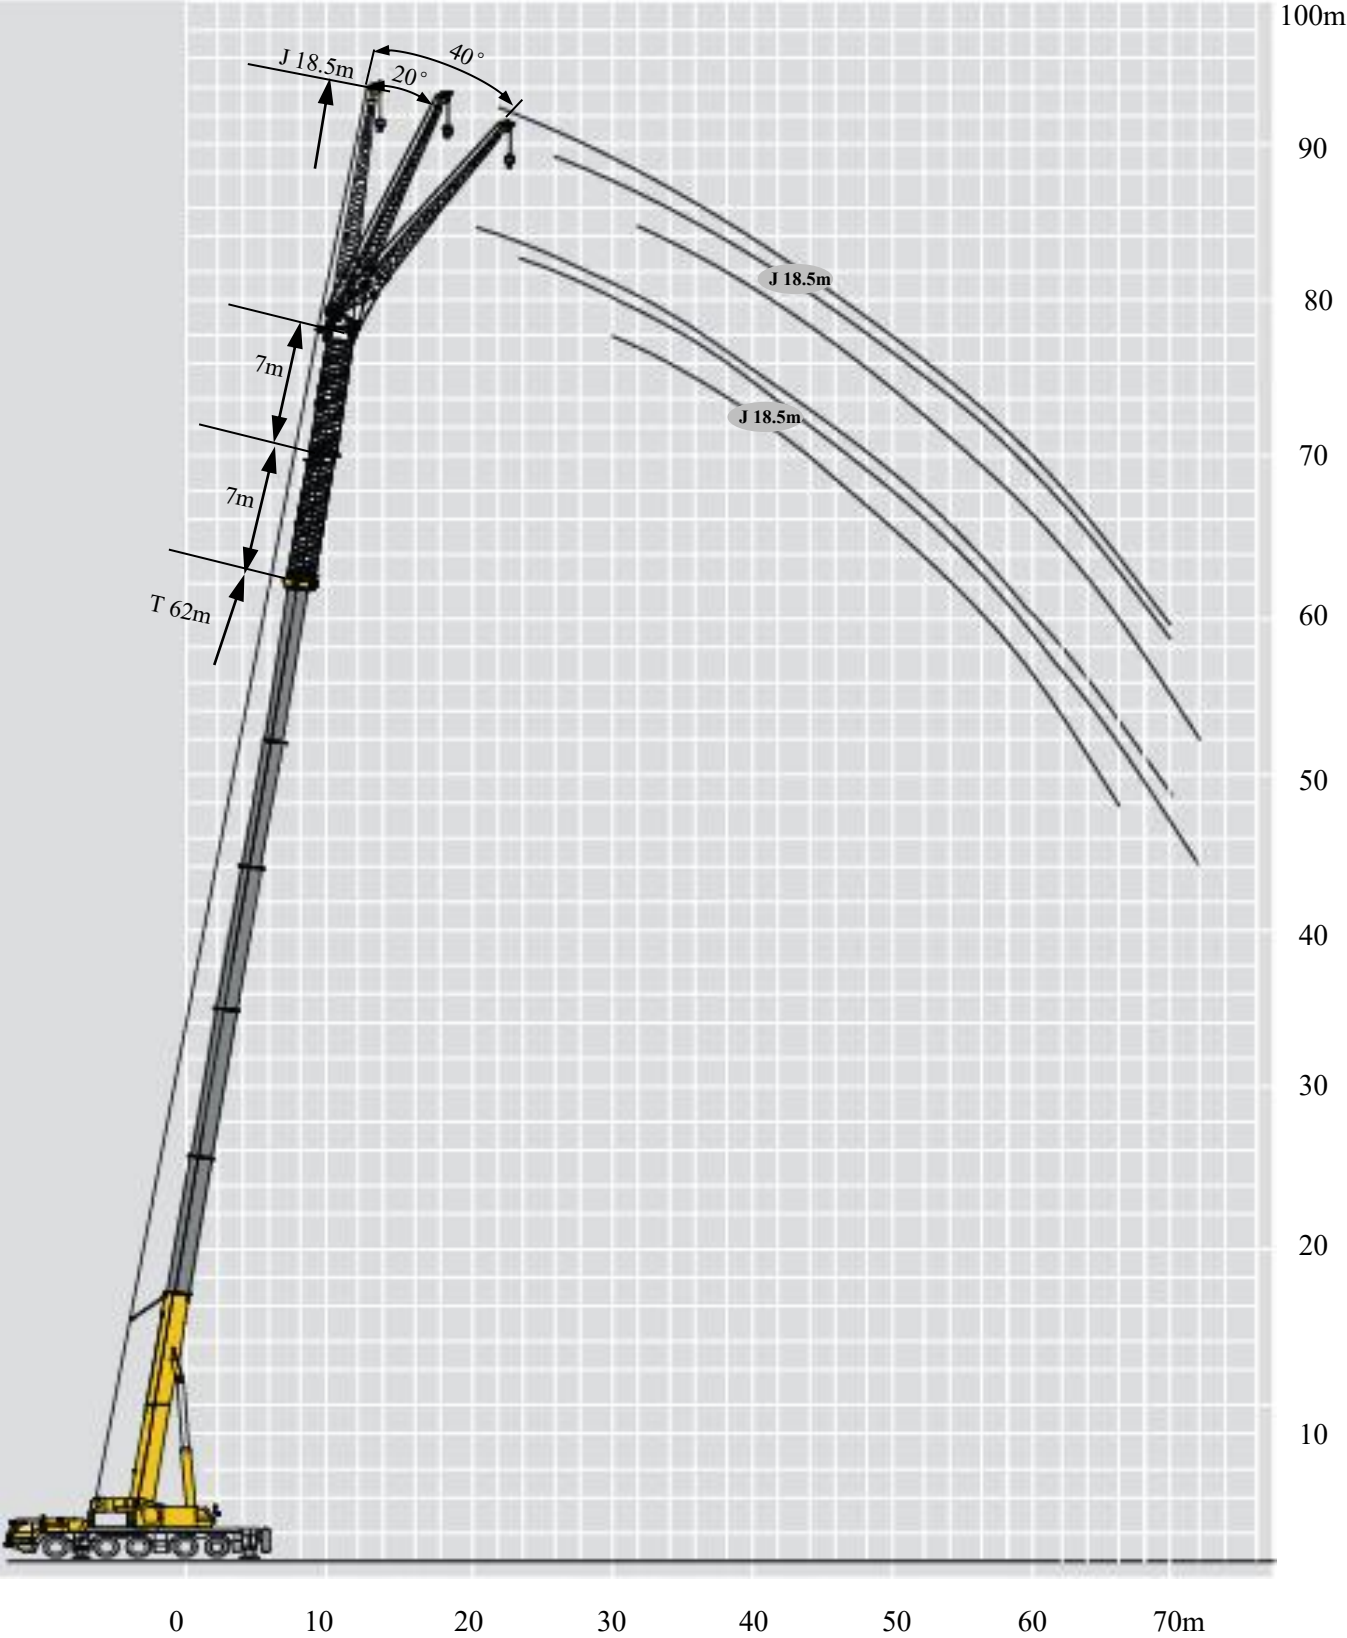

起重性能表
Load charts

J 11m/18.5 m

 13.1-62m  18.5m  8.35×7.7m  360°  44.5t  EN  							
58.1+7m				62+7m			
	0°	20°	40°	0°	20°	40°	
18	4.0						18
20	4.0			3.5			20
22	4.0			3.4			22
24	3.9	4.1		3.4	3.3		24
26	3.9	3.9		3.4	3.3		26
28	3.9	3.6	2.5	3.3	3.3		28
30	3.8	3.4	2.4	3.3	3.3	2.6	30
32	3.8	3.3	2.3	3.3	3.3	2.5	32
34	3.7	3.1	2.2	3.2	3.2	2.4	34
36	3.7	3.0	2.1	3.2	3.1	2.2	36
38	3.6	2.9	2.1	3.1	3.0	2.1	38
40	3.6	2.8	2.1	3.1	3.0	2.0	40
42	3.5	2.7	2.0	3.0	2.9	2.0	42
44	3.5	2.6	2.0	2.8	2.6	2.0	44
46	3.0	2.5	2.0	2.5	2.6	2.0	46
48	3.0	2.5	2.0	2.5	2.6	2.0	48
50	2.5	2.4	1.9	2.0	2.1	2.0	50
52	2.3	2.4	1.9	2.0	2.1	1.9	52
54	1.6	2.2	1.9	1.8	1.9	1.9	54
56	1.5	2.1	1.9	1.6	1.8	1.9	56
58	1.5	1.8	1.9	1.6	1.6	1.4	58
60	1.2	1.6	1.2	1.5	0.8	1.4	60
62	1.5	1.4	1.2	1.1	0.8	1.3	62
64	1.0	1.4	1.2	0.5	0.5	0.8	64
66		1.2	1.2	0.5	0.5	0.5	66
68			0.8	0.5	0.5		68
70				0.5	0.5		70
72					0.5		72
组合 Code	22222			33333			组合 Code

起重性能表
Load charts

J 11m/18.5 m

  EN 							
58.1+14m				62+14m			
	0°	20°	40°	0°	20°	40°	
20	3.5						20
22	3.5			3.0			22
24	3.5			3.0			24
26	3.4	3.4		3.0	2.9		26
28	3.4	3.3		3.0	2.8		28
30	3.4	3.3	2.4	3.0	2.8		30
32	3.3	3.3	2.3	2.9	2.8	2.6	32
34	3.3	3.3	2.3	2.9	2.7	2.5	34
36	3.2	3.2	2.2	2.9	2.7	2.4	36
38	3.2	3.0	2.1	2.9	2.7	2.2	38
40	3.1	2.9	2.1	2.9	2.7	2.1	40
42	3.0	2.9	2.1	2.6	2.7	2.1	42
44	2.6	2.8	2.0	2.3	2.6	2.0	44
46	2.5	2.6	2.0	2.3	2.1	2.0	46
48	2.4	2.3	2.0	1.8	2.1	2.0	48
50	2.1	2.1	2.0	1.8	1.9	2.0	50
52	1.9	2.1	2.0	1.8	1.7	1.8	52
54	1.7	1.6	2.0	1.0	1.4	1.5	54
56	1.6	1.6	1.8	1.8	1.8	1.5	56
58	1.5	1.6	1.5	1.6	1.2	1.5	58
60	1.5	1.4	1.5	1.5	1.2	1.5	60
62	1.2	1.5	1.5	1.3	1.2	0.8	62
64	1.2	1.2	1.2	1.1	0.8	0.8	64
66	1.0	1.2	1.2	0.9	0.8	0.8	66
68	0.8	0.8	0.8	0.7	0.8	0.5	68
70			0.8	0.5	0.5	0.5	70
72						0.5	72
组合 Code	22222			33333			组合 Code

起重性能表
Load charts

J 11m/18.5 m

 13.1-62m 18.5m 8.35×7.7m 360° 6.2t EN 							
58.1+7m				62+7m			
	0°	20°	40°	0°	20°	40°	
18	4.0						18
20	4.0			3.5			20
22	4.0			3.4			22
24	3.8	4.1		3.4	3.3		24
26	3.0	3.9		2.9	3.3		26
28	2.3	3.3	2.5	2.2	3.3		28
30	1.8	2.7	2.4	1.7	2.6	2.6	30
32	1.3	2.1	2.3	1.2	2.0	2.5	32
34	0.8	1.6	2.2	0.7	1.5	2.2	34
36	0.5	1.2	1.7		1.1	1.7	36
38		0.8	1.3		0.7	1.3	38
40			0.9			0.9	40
42			0.6				42
组合 Code	22222			33333			组合 Code

 13.1-62m 18.5m 8.35×7.7m 360° 6.2t EN 							
58.1+14m				62+14m			
	0°	20°	40°	0°	20°	40°	
20	3.5						20
22	3.5			3.0			22
24	3.5			3.0			24
26	3.0	3.4		2.9	2.9		26
28	2.3	3.3		2.2	2.8		28
30	1.7	2.7	2.4	1.6	2.6		30
32	1.2	2.1	2.3	1.1	2.0	2.6	32
34	0.8	1.6	2.3	0.7	1.5	2.2	34
36		1.2	1.8		1.1	1.7	36
38		0.8	1.3		0.7	1.3	38
40			0.9			0.9	40
42			0.6			0.5	42
组合 Code	22222			33333			组合 Code

符号标识

Description of symbols

常规标识

General symbols

	上车 Superstructure		底盘 Chassis
	起重能力 Lifting capacity		车桥 Axle
	吊臂长度 Boom length		行驶速度 Driving speed
	工作幅度 Radius		爬坡能力 Grade ability
	吊臂仰角 Boom angle		轮胎 Tires
	主臂起升高度 Lifting height with boom		支腿 Outriggers
	固定副臂长度 Fixed jib length		吊钩 Hook block
	副臂安装角 Jib offset angle		平衡重 Counterweight
	副臂起升高度 Lifting height with jib		卷扬 Winch
	独立臂头 Independent jib head		360°全回转 360° operation of the boom
	主臂加长节 Boom extension		标准 Standard

主要技术参数表
Table of main technical parameters

类别 Category	项目 Item		单位 Unit	参数 Parameter		
尺寸参数 Dimensions	外形尺寸 (长×宽×高) Dimensions (length ×width ×height)		mm	15288×2750×3950 (14.0R25) 15288×2750×4000 (16.0R25) 15288×2850×4000 (20.5R25)		
	轴距 Axle spacing		mm	2500+1650+2100+1650		
	轮距 (前/后) Track (Front/ Rear)		mm	2340 (14.0R25) 2296 (16.0R25) 2308 (20.5R25)		
	前悬/后悬 Front/ Rear overhang		mm	2611/2616		
	前伸/后伸 Front/ Rear extension		mm	2161/0		
重量参数 Weight	最大允许总质量 Max. permissible total weight		kg	60000		
	轴荷 Axle load	一轴 1st axle	kg	12000		
		二轴 2nd axle	kg	12000		
		三轴 3rd axle	kg	12000		
		四轴 4th axle	kg	12000		
		五轴 5th axle	kg	12000		
动力参数 Power	发动机型号 Engine model		——	OM471LA (EU Stage IV)	OM471LA (EU Stage V)	
	额定功率/转速 Engine rated power/ rotation speed		kW/(r/min)	360/1700	360/1600	
	最大净功率/转速 Max. net power/rotation speed		kW/(r/min)	360/1700	360/1600	
	最大输出扭矩/转速 Max. output torque/rotation speed		N.m/(r/min)	2300/1300	2400/1300	
行驶参数 Travel	最高车速 Max. travel speed		km/h	80 (14.0R25/16.0R25) /70(20.5R25)		
	最低稳定车速 Min. stable travel speed		km/h	3		
	最小转弯直径 Min. turning diameter		m	≤18 (小转弯 All-wheel steering, 五桥转向five-axle steering) ; ≤22 (公路 Road steering, 五桥转向five-axle steering)		
	臂头最小转弯直径 Min. turning diameter at boom head		m	≤23.3 (小转弯 All-wheel steering, 五桥转向five-axle steering) ; ≤27.2 (公路 Road steering, 五桥转向five-axle steering)		
	最小离地间隙 Min. ground clearance		mm	330 (14.0R25) 380 (16.0R25/20.5R25)		
	接近角 Approach angle		°	18 (14.0R25) 19 (16.0R25/20.5R25)		
	离去角 Departure angle		°	14 (14.0R25) 15 (16.0R25/20.5R25)		
	制动距离 (制动初速度为30km/h) Braking distance (at 30 km/h)		m	≤10		
	最大爬坡能力 Max. grade ability		%	60		
	百公里油耗 Fuel consumption per 100 km		L	65		
	噪音 Noise	加速行驶机外噪声 Exterior noise level when accelerating		dB(A)	84 (ECE R51-03)	
		驾驶员耳旁噪声 Noise level at seated position		dB(A)	90	

主要技术参数表
Table of main technical parameters

类别 Category	项目 Item		单位 Unit	参数 Parameter	
主要性能参数 Main performance	最大额定总起重量 Max. total rated lifting capacity		t	130	
	最小额定工作幅度 Min. rated working radius		m	3	
	转台尾部回转半径 Turning radius at turntable tail	平衡重处 Counterweight	mm	4630/4335	
		副卷处 Auxiliary winch	mm	4600	
	最大起重力矩 Max. load moment	基本臂 Base boom	kN.m	4468	
		最长主臂 Fully-extended boom	kN.m	2297	
		最长主臂+副臂 Fully-extended boom + Jib	kN.m	1976	
	支腿跨距 Outrigger span	纵向 Longitudinal	m	8.35	
		横向 Lateral	m	3.7/5/6.3/7.7	
	起升高度 Lifting height	基本臂 Base boom	m	12.1	
		最长主臂 Fully-extended boom	m	61.5	
		最长主臂+副臂 Fully-extended boom + Jib	m	92.5	
	起重臂长度 Boom length	基本臂 Base boom	m	13.1	
		最长主臂 Fully-extended boom	m	62	
		最长主臂+副臂 Fully-extended boom + Jib	m	94.5	
	副臂安装角 Jib offset angle		°	0, 20, 40	
工作速度参数 Working speed	起重臂起臂时间 Time for raising boom		s	≤65	
	起重臂全伸时间 Time for fully extending the boom		s	≤630	
	最大回转速度 Max. slewing speed		r/min	≥1.65	
	支腿收放时间 Time for extending and retracting outriggers	水平支腿 Outrigger beam	收 Retracting	s	≤25
			放 Extending	s	≤20
		垂直支腿 Outrigger jack	收 Retracting	s	≤55
			放 Extending	s	≤45
	起升速度（单绳,第四层,空载） Lifting speed (single line, 4th layer, no load)	主起升机构 Main winch		m/min	≥130
副起升机构 Auxiliary winch		m/min	≥130		
噪声 Noise	机外辐射 Exterior noise level		dB (A)	≤109	
	司机位置处 Noise level at seated position		dB (A)	≤80	

1. 表中额定总起重量值，是在平整的坚固地面上本起重机能够保证的最大总起重量，包括吊钩和吊具的重量，所以为了估算重物重量，必须减去上述的装置重量。
2. 表中的工作幅度为起吊重物离地时起重物到起重机回转轴线的水平距离，是包括起重臂变形量在内的实际值，因而起吊前应考虑起重臂变形量。
3. 只允许在5级(瞬时风速14.1m/s，风压125N/m²)风以下进行作业。
4. 吊重前操作者必须对物体的重量和工作范围了解后选择合适的作业工况，严禁超出表中的数值。幅度及臂长在相邻两个数值之间时，应依据两个数值中较小值确定起重作业。
5. 应按主臂仰角范围作业，即使是空载，也不应使主臂仰角处于范围外，谨防整机倾翻。
6. 表中的主臂长度应要按照每节臂的伸缩要求进行伸出。

1. The total rated loads given in the rated load charts are the maximum lifting capacity when the crane is set up on firm and level ground, which includes the weight of the hook block and slings. The weight of above-mentioned devices should be deducted from the rated lifting load.
2. The working radius shown in the rated load charts is the radius when the load is lifted off the ground, and it is the actual value including loaded boom deflection. Take boom deflection into consideration before beginning a lifting operation.
3. A lifting operation is permissible only when the wind force is below grade 5 (instantaneous wind speed is 14.1 m/s, wind pressure is 125 N/m²).
4. Before beginning lifting operation, the operator should know the weight of the load to be lifted and its working range, and then select proper working conditions. Never operate the crane beyond the limit shown in the chart. Use the lower value from the chart when the boom length or working radius is between the range of values.
5. Observe the boom angle limit. Never operate the crane with the boom angle beyond the recommended limit even if a load is not being carried. Otherwise, the crane will tip.
6. The boom should be extended according to the telescoping code shown by digits, which means the percentage of boom sections extended.



地址: 江苏省徐州市经济技术开发区高新路68号
No. 68, Gaoxin Road, Economic and Technological Development
Zone, Xuzhou, Jiangsu, P. R. China
电话(Tel): +86-516-83462242
质量监督电话(Quality Inquiry Tel): +86-516-87888268
备件电话(Spare Parts Tel): +86-516-83461542
邮编(Post Code): 221004
网址(Web): www.xcmg.com

服务热线Service Tel
400-110-9999

禁止任何形式的非法复制!
Do not copy without authorization!



本文件不属于合同。出于产品不断改进的需要，我们保留对产品型号、参数、配置进行变更的权利，恕不另行通知。图片仅供参考，具体产品以实物为准。图片中产品可能并非标准配置，部分部件可能需要另行购置。办理牌照和上路行驶需遵守当地法规。
This document is non-contractual. Constant improvement and engineering progress make it necessary that we reserve the right to make product model, specification and configuration changes without notice. Illustrations shown may include optional equipment and accessories and may not include all standard equipment. Some parts need to be purchased separately. Conform to the local laws for license application and road traveling.