


XE135E

Crawler Excavator



- Operating mass (kg): 14800
- Bucket capacity (m³): 0.55
- Rated power (kW): 90

- Widely used in hydropower, transportation, municipal engineering, landscaping, farmland reconstruction and oil pipeline constructions.
- 3 m long arm as standard provides a wider digging range to improve the operating conditions adaptability.
- PTO pump as standard can independently control the rotary pipeline to improve the precise flow control.
- The full-size reinforced chassis structure and working device ensure the stability of the whole machine while working with strong digging force.

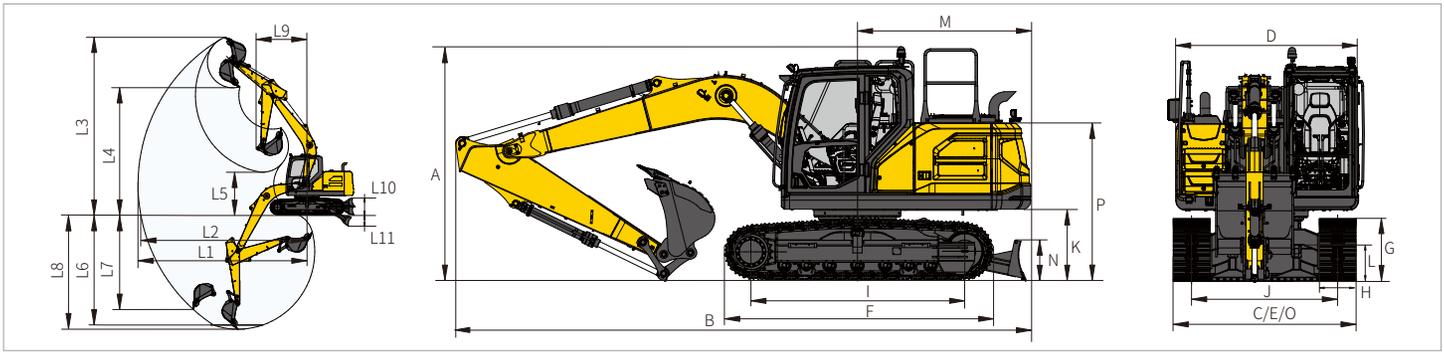

Technical Specifications

Item contents	Unit	Parameters
Operating mass	kg	14800
Engine		
Engine brand/model	-	Cummins/F3.8
Rated power/rpm	kW/rpm	90/2200
Direct injection	-	√
Electric injection	-	√
4-stroke	-	√
Water-cooled	-	√
Turbocharged	-	√
Air-to-Air intercooling	-	√
Stroke	mm	115
Cylinder bore	mm	102
Number of cylinders	-	4
Maximum torque/rpm	N-m/rpm	500/1500
Displacement	L	3.8

Main performance		
Travel speed (high/low)	km/h	4.7/2.9
Swing speed	r/min	11.3
Maximum swing torque	kN-m	32
Gradeability	-	35° (70%)
Ground contact pressure	kPa	45.77
Bucket digging force (SAE)	kN	107
Arm digging force (SAE)	kN	80
Maximum traction force	kN	134

Hydraulic system		
Main pump	-	2 × Variable displacement pumps
Pilot pump	-	1 × Gear pump
PTO pump	-	1 × Gear pump
Maximum flow rate of main system	L/min	2 × 120
PTO pump flow rate	L/min	53
Main system pressure	MPa	34.3
Main system pressure (power-max pressure)	MPa	37
Pilot system pressure	MPa	3.9
PTO pump pressure	MPa	25
Traveling system pressure	MPa	34.3
Swing system pressure	MPa	25

Cab standard		
ISO 10262: 1998 (OPG)	-	√
ISO 12117-2: 2008 (ROPS)	-	√

Oil capacity		
Fuel tank capacity	L	250
DEF tank capacity	L	25
Hydraulic oil tank capacity	L	90

Item contents	Unit	Parameters
Dimensions		
A Overall height	mm	3135
B Overall length	mm	7825
C Overall width	mm	2490
D Upper structure width	mm	2490
E Undercarriage width (extended/retracted)	mm	2490
F Track length	mm	3643
G Track height	mm	836
H Standard track shoe width	mm	500
I Crawler base	mm	2917
J Track gauge (extended/retracted)	mm	1990
K Counterweight ground clearance	mm	940
L Minimum ground clearance	mm	466
M Rear-end swing radius	mm	2360
N Dozer blade height	mm	525
O Dozer blade width (unfolded/folded)	mm	2490
P Height of engine hood	mm	2225

Working range		
L1 Maximum reach	mm	8145
L2 Maximum reach at GRP	mm	8005
L3 Maximum digging height	mm	8620
L4 Maximum unloading height	mm	6195
L5 Minimum unloading height	mm	1490
L6 Digging depth at 8 feet floor length	mm	5450
L7 Maximum vertical digging depth	mm	4470
L8 Maximum digging depth	mm	5575
L9 Minimum swing radius	mm	2475
L10 Maximum lifting height of dozer blade	mm	400
L11 Maximum cutting depth of dozer blade	mm	530

Tracks		
Standard track shoe width	mm	500
Number of track shoes (per side)	-	44
Number of track rollers (per side)	-	7
Number of track carrier rollers (carrierplate) (perside)	-	1

Standard		
Length of boom	mm	4600
Length of arm	mm	2520
Bucket capacity	m ³	0.55 <small>(Heavy duty bucket)</small>

Optional		
Length of boom	mm	-
Length of arm	mm	-
Bucket capacity	m ³	0.52 <small>(Heavy duty bucket)</small> 0.52 <small>(Rock bucket)</small>

