



SOLID
TO SUCCEED



SCISSOR LIFT XG0608HA

Comply with CE

Standard configuration

- Withdrawable platform extension with position lock
- Lanyard attach points
- Self-locking half-height swing gate and folding guardrail
- Front-wheel drive
- Travel driven by hydraulic motor
- Full proportion travel and lift control
- 25 % gradeability
- DC maintenance-free battery
- Lubrication-free bearing
- Swing-out component tray
- Brake release for towing
- Emergency stop devices on platform and ground controls
- Anti-slipping metal platform
- Load sensing alarm
- Lowering alarm
- 3-second delay descent
- Multi-axis tilt sensor
- Multi-disc brake
- Scissor maintenance lock
- Auto brake system
- Pothole protection device
- Onboard Diagnostic System
- Electric horn
- Scissor-elevated automatic low speed protection
- Charging protection system
- Removable platform control
- Intelligent charger
- Hourmeter
- Side fork pockets
- Flashing indicator light
- Humanized control system
- Platform control with battery level display
- Manual platform descent valve
- Tilt sensor and audio alarm



Working height
6.0 meters



Lift capacity
200Kg



Electric
power



Optional configuration

- Platform searchlight
- Platform external power supply
- Air line
- Platform fire extinguisher
- Platform anti-collision device
- Platform foot pedal
- Boom end cover
- Joystick bracket fixing


XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO.,LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com

Scissor Lift-Electric

Item	Metric
Dimension	
Overall length (without ladder/outriggers)	1568(1410)mm
Overall width	810 mm
Overall height (platform folded)	2076(1714)mm
Platform length	1372mm
Platform width	702mm
Subplatform extension length	600mm
Guardrail height	1119mm
Toeboard height	168mm
Wheelbase	1130mm
Min. ground clearance (pothole protection deployed/undeployed)	33mm/61mm
Performance	
Max. working height (indoor/outdoor)	6.0 m/6.0 m
Max. platform height (indoor/outdoor)	4.0 m/4.0 m
Min. platform height	0.96 m
Max. driving height	4.0 m
Rated load	200 kg
Subplatform rated load	115 kg
Max. number of occupants (indoor/outdoor)	1/1
Max. driving speed (stowed)	3 km/h
Max. driving speed (raised)	0.5 km/h
Max. gradeability	25%
Min. turning radius (inside)	0.45 m
Min. turning radius (outside)	1.6 m
Platform raising time	19-29s
Platform lowering time	19-29s
Max. working slope (side to side/front and rear)	1.5°/3°
Power source	
Maintenance-free lead-acid batteries	
Battery voltage	24 V
Battery capacity (3HR)	100 Ah
Battery charger	24 V/15 A
Lifting motor	2.5 kW/24V
Hydraulic tank capacity	4 L
Tire	
Tire size	280mm×76 mm
Tire ground pressure	7.49 kg/cm ²
Driving wheels	2
Braking wheels	2
Steering wheels	2
Weight	
Total weight	990 kg

Stowed

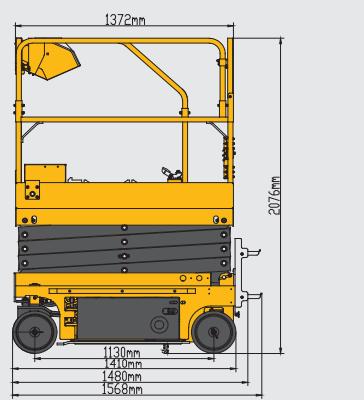

Trans

