



SOLID
TO SUCCEED



SCISSOR LIFT XG1212HA

Comply with CE

Standard configuration

- Withdrawable extension platform with position lock
- Lanyard connection point
- Self-locking half-height revolving door and folding guardrail
- Front-wheel drive
- Travel driven by hydraulic motor
- Full proportion travel and lift control
- 25 % gradeability
- DC maintenance-free battery
- Lubrication-free bearing
- Rotating-type component tray
- Brake release for towing
- Emergency stop device of platform and ground control
- Anti-slipping metal platform
- Weighing alarm
- Lowering alarm
- 3-second pause for lowering
- Multi-axis tilt sensor
- Multi-disc brake
- Boom maintenance lock
- Auto brake system
- Pothole protection device
- Random fault diagnosis system
- Electric horn
- High-altitude automatic low speed protection
- Charging protection system
- Detachable superstructure controller
- Intelligent charger
- Hourmeter
- Longitudinal forklift transport hole
- Flashing indicator light
- Humanized control system
- Platform control with battery level display
- Manual platform lowering valve
- Tilt sensor and audio alarm



Working height
12 meters



Lift capacity
320Kg



Electric
power



Optional configuration

- Platform searchlight
- Platform external power supply
- Air pipe
- Platform fire extinguisher
- Platform anti-collision device
- Platform foot pedal
- Boom end cover
- PCU protective support

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO.,LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com

XG1212HA



SOLID
TO SUCCEED

Scissor Lift-Electric

Item	Metric
Dimension	
Overall length (without ladder/outriggers)	2477(2267) mm
Overall width	1190 mm
Overall height (platform folded)	2480 (1930) mm
Platform length	2280 mm
Platform width	1120 mm
Subplatform extension length	900 mm
Guardrail height	1135 mm
Toeboard height	150 mm
Wheelbase	1877 mm
Min. ground clearance (pothole protection deployed/undeployed)	20/100 mm


Performance	
Max. working height (indoor/outdoor)	12m
Max. platform height (indoor/outdoor)	10m
Min. platform height	1.47 m
Max. driving height	10m
Rated load	320 kg
Subplatform rated load	115 kg
Max. number of occupants (indoor/outdoor)	2/1
Max. driving speed (stowed)	3.2km/h
Max. driving speed (raised)	0.8 km/h
Max. gradeability	25%
Min. turning radius (inside)	0 m
Min. turning radius (outside)	2.3 m
Platform raising time	50-75 s
Platform lowering time	43-65 s
Max. working slope (side to side/front and rear)	1.5°/3°

Power source	Maintenance-free lead-acid batteries
Battery voltage	24 V
Battery capacity (3HR)	200Ah-225Ah
Battery charger	24 V/30A
Traveling motor	/
Lifting motor	3.5kW/16V
Hydraulic tank capacity	22 L

Tire	
Tire size	381mm×127 mm
Tire ground pressure	13.3 kg/cm ²
Driving wheels	2
Braking wheels	2
Steering wheels	2

Weight	
Total weight	2850 kg

Stowed

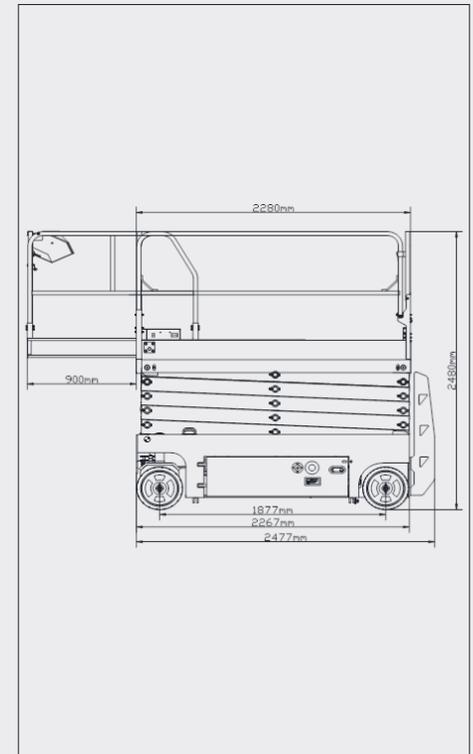

Trans

