




Parameter


Item	Unit	XGA26K	XGA26K1
Dimension			
a.Overall length(stowed)	mm	11760	11760
Overall length(transportation)	mm	9900	9900
b.Overall width	mm	2490	2490
c.Overall height	mm	2950	2950
Platform dimension	mm	2400 × 900 × 1150	2400 × 900 × 1150
d.Wheelbase	mm	3000	3000
Max. working height	m	26.6	26.6
Max. platform height	m	24.6	24.6
Max. working range	m	19.5	19.5
Performance			
Max.load capacity	kg	256	150(Unrestricted) / 256(Restricted)
Primary boom luffing range	°	-1~ +70	-1~ +70
Telescopic boom luffing range	°	-35~ +68	-35~ +68
Turntable rotation angle	°	360 continuous	360 continuous
Tailswing of turntable (boom lift up)	mm	1330	1330
Platform rotation angle	°	160	160
Total weight	kg	18100	16500
Travel speed (stowed)	km/h	5	5
Travel speed (elevated/extended)	km/h	0.6	0.6
Min.turning radius (4WS)	m	< 4.4 (outside)	< 4.4 (outside)
Min.ground clearance	mm	380	380
Max.gradeability (counterweight upwards)	%	45% (24°)	45% (24°)
Power source			
Tire specification	/	18-625	18-625
Engine model	/	Yuchai YCF3065-T482 V2607-CR-TE5B-XCM-2S	Yuchai YCF3065-T482
Rated Power	kw(rpm)	48(2400) / 48(2400)	48(2400)
Hydraulic tank capacity	L	150	150
Fuel tank capacity	L	180	180
Hydraulic system capacity	L	300	300

Options

Half-height mesh platform / Anti-squeeze hand-assisted track of the platform / Aircraft protection device
 Anti-falling assembly / Anti extrusion device / Tool tray / Working light

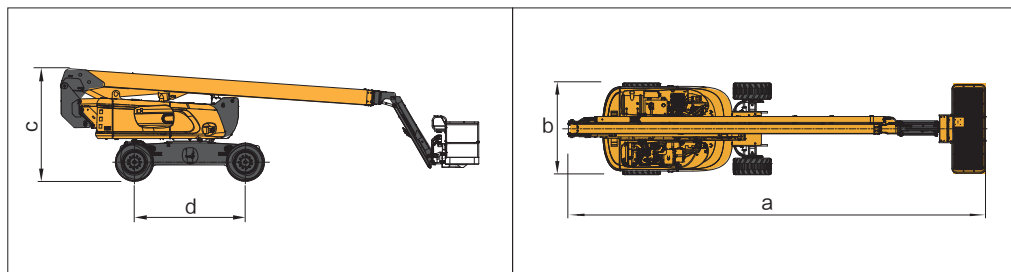

Work Curve Graph

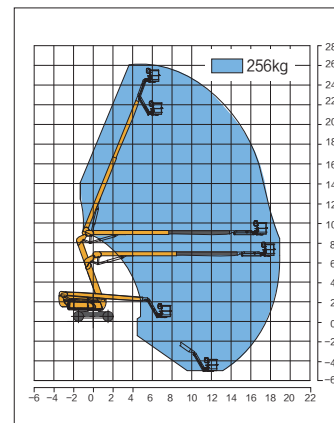

Global service hotline: 400 110 9999

