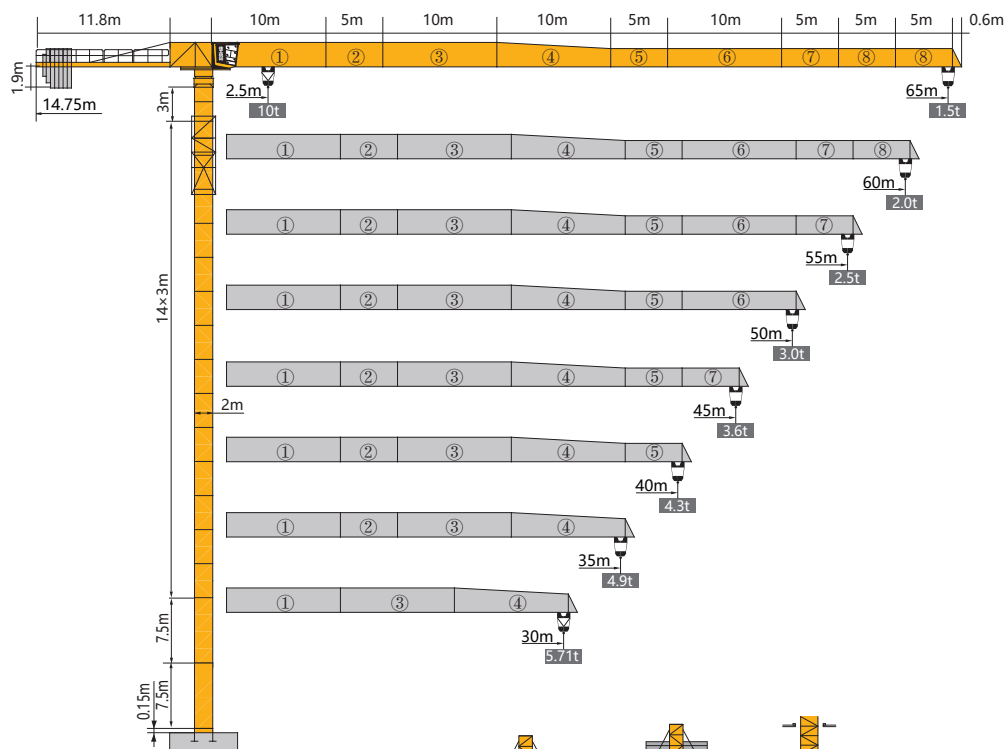




固定式
Stationary

底架压重式
Under frame loading

行走式
Travelling

内爬式
Inner-climbing type

* 可变换的其他安装方式与我们协商 Mounting possibilities Consult us.

平头系列 Topless

起重特性





Load Diagrams

起重臂 jib		R _{min}	R(C _{max})	C _{max}	幅度 (m) / 起重 量 (kg)											Range(m) / Loading (kg)				
R(m)	α	m	m	kg	15	20	25	30	35	40	45	50	55	60	65					
65		2.5	26.3	5000	5000			4260	3520	2970	2540	2200	1920	1690	1500					
		2.5	14.4	10000	9550	6800	5210	4170	3430	2880	2450	2110	1830	1600	1410					
60		2.5	29.4	5000	5000			4880	4050	3430	2950	2570	2260	2000						
		2.5	16.1	10000	10000	7760	5960	4790	3960	3340	2860	2480	2170	1910						
55		2.5	31.6	5000	5000				4430	3760	3250	2840	2500							
		2.5	17.3	10000	10000	8450	6500	5240	4340	3670	3160	2750	2410							
50		2.5	33.0	5000	5000				4670	3970	3430	3000								
		2.5	18.0	10000	10000	8850	6840	5510	4580	3880	3340	2910								
45		2.5	34.3	5000	5000				4890	4160	3600									
		2.5	18.7	10000	10000	9270	7150	5770	4800	4070	3510									
40		2.5	35.3	5000	5000					4300										
		2.5	19.2	10000	10000	9560	7370	5960	4960	4210										
35		2.5	34.4	5000	5000				4900											
		2.5	18.8	10000	10000	9300	7170	5790	4810											
30		2.5	30.0	5000	5000															
		2.5	18.6	10000	10000	9170	7080	5710												

起升高度

Hoisting Height

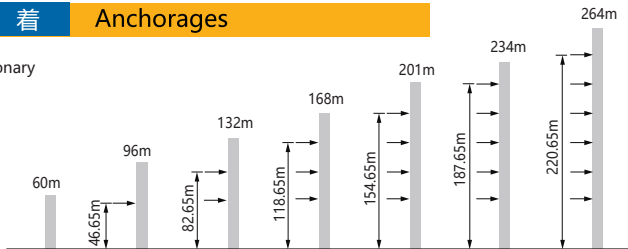
3m	L68B1					
17	60	-	-	-	-	-
16	57	-	-	-	-	-
15	54	-	60	-	-	48.9
14	51	60	57	57.5	-	45.9
13	48	57	54	54.5	-	42.9
12	45	54	51	51.5	-	39.9
11	42	51	48	48.5	-	36.9
10	39	48	45	45.5	-	33.9
9	36	45	42	42.5	-	30.9
8	33	42	39	39.5	-	27.9
7	30	39	36	36.5	-	24.9
6	27	36	33	33.5	-	21.9
5	24	33	30	30.5	-	18.9
4	21	30	27	27.5	-	15.9
3	18	27	24	24.5	-	12.9
2	15	24	21	21.5	-	9.9
1	12	21	18	18.5	-	6.9
0	9	18	15	15.5	-	3.9

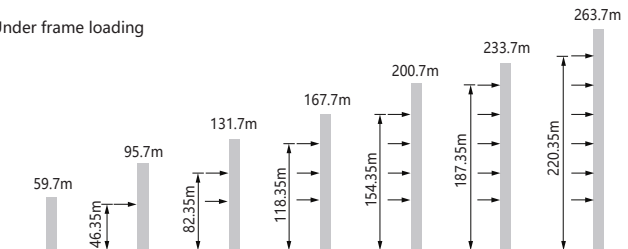

附着

Anchorage

固定式 Stationary



底架压重式 Under frame loading



* 如需其他的高度，请与我们联系。For other heights, consult us please.

XGT6515E-10 S1

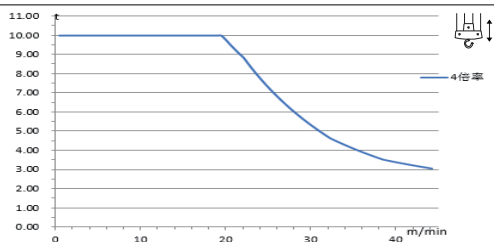
传动机构 Mechanisms

37KW (37LVF25CE)

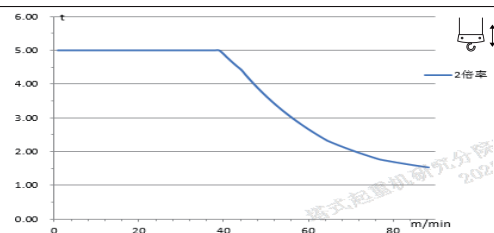
max.530m



	(t)	(m/min)
1	10	0↔20
2	4.6	0↔32
3	3	0↔45



	(t)	(m/min)
1	5	0↔40
2	2.3	0↔64
3	1.5	0↔90



传动机构 Mechanisms	图例 Legend	型号 Model	速度 (m/min) Speed		起重量 (t) Hoist Weight	容绳量 (m) Rope Capacity	功率 (kW) Power
起 升 Hoisting		37LVF25CE		0-40	5	530 >530*	37
				0-64	2.3		
				0-90	1.5		
				0-20	10		
				0-32	4.6		
				0-45	3		
变 幅 Trolleying		4DVF4E	0-75m/min				4
回 转 Slewing		11RVF	0-0.7r/min				2×5.5
行 走 Travelling		RT	0-25m/min				4×4
电 源 Main Supply						~ 380V (±10%) 50Hz	
总功率 (不含顶升和行走) Gross Power (Excluding climbing and travelling)							52kW

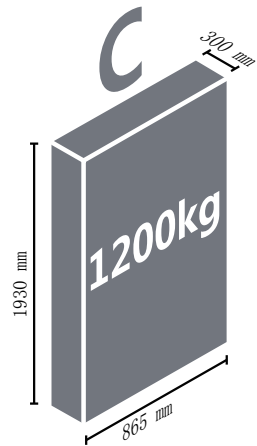
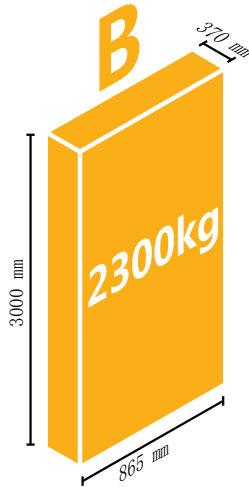
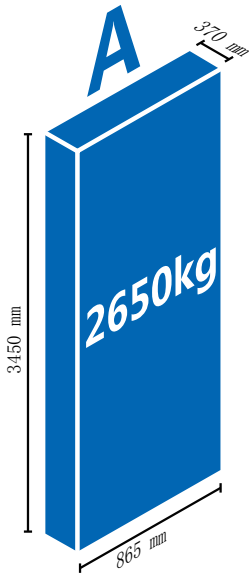
★ 如需其他配置，请与我们联系。 For other configuration, consult us please.

此样本所列技术参数不受法律约束，具体请详见相应产品说明书。

These brochure of specifications and data are not legally binding, specific instructions please based on our product manuals.

配重配置

Counter-jib Ballast



配重配置 Counter-jib Ballast		A-B-C			
吊钩 (m)	吊钩 (m)	重量 (kg)	A	B	C
65	14.75	16750	5	1	1
60	14.75	16750	5	1	1
55	14.75	15550	5	1	0
50	14.75	14450	5	0	1
45	14.75	13250	5	0	0
40	14.75	12900	4	1	0
35	14.75	11450	3	1	1
30	14.75	9150	3	0	1

运输方案

Transport



65m



60m



×4

车长 (Length of Trailer)

4: 4×17.5m



×7

7: 40米高柜 (40hq)








运输单元

Packing List







No.	名称 Description	形状 Sketch	L (m)	B (m)	H (m)	单件重量 Weight Per piece (kg) ±5%	数量 Nb.
1	臂节一 Jib 1		10.2	1.1	2.5	1990	1
2	臂节二 Jib 2		5.2	1.1	2.3	800	1
3	臂节三 Jib 3		10.2	1.1	2.3	1214	1
4	臂节四 Jib 4		10.2	1.1	2.2	948	1
5	臂节五 Jib 5		5.2	1.1	1.7	413	1

运输单元

Packing List

No.	名称 Description	形状 Sketch	L(m)	B(m)	H(m)	单件重量 Weight Per piece(kg) $\pm 5\%$	数量 Nb.
6	臂节六 Jib 6		10.2	1.1	1.7	674	1
7	臂节七 Jib 7		5.1	1.1	1.7	268	1
8	臂节八/九 Jib 8/9		5.1	1.1	1.7	235	2
9	臂头 Jib end		0.6	1.1	2.0	70	1
10	平衡臂臂节一 Counter jib 1		4.0	1.2	2.3	1805	1
11	平衡臂臂节二 Counter jib 2		11.8	2.1	0.6	2832	1
12	起升机构 Hoisting mechanism		1.45	2.06	1.01	1290	1
13	变幅机构 Trolleying mechanism		1.4	0.6	0.61	312	1

运输单元 Packing List

No.	名称 Description	形状 Sketch	L(m)	B(m)	H (m)	单件重量 Weight Per piece (kg) ±5%	数量 Nb.
14	回转机构 Slewing mechanism		0.7	0.4	0.4	170	2
15	电控柜 Electric control cabinet		1.4	0.5	1.5	250	1
16	司机室 Cab		1.9	1.2	2.2	500	1
17	回转总成 (上 支座与下支 座) Slewing assembly (Upper Support and Lower Support)		2.1	2.1	1.5	2275	1
18	小车总成 Car assembly		1.9	1.8	1.2	347	1
19	吊钩 Hook		1.3	0.4	1.9	355	1





运输单元

Packing List





No.	名称 Description	形状 Sketch	L(m)	B(m)	H (m)	单件重量 Weight Per piece (kg) ±5%	数量 Nb.
20	特殊节 Special mast		2.5	2.5	3.8	1946	1
21	爬升架 Climbing frame		2.8	2.6	7.2	3060	1
22	基础节 1 Basic mast 1		2.0	2.0	7.5	3619	1

运输单元

Packing List

No.	名称 Description	形状 Sketch	L(m)	B(m)	H (m)	单件重量 Weight Per piece (kg) ±5%	数量 Nb.
23	基础节 2 Basic mast 2		2.0	2.0	7.5	4079	1
24	标准节 Mast		2.0	2.0	3.0	1779	14
25	支腿 Outrigger		0.6	0.6	1.2	240	4
26	小支腿 (选配) Small Outrigger (Optional)		0.6	0.6	0.8	219	4

运输单元 Packing List

No.	名称 Description	形状 Sketch	L(m)	B(m)	H (m)	单件重量 W eight Per piece (kg) ±5%	数量 Nb.
27	底架节 (选配) Underframe joint (Optional)		2.35	2.45	5.03	4782	1
28	1.5m 内爬节 (选配) 1.5m Inner Climbing mast (Optional)		2.0	2.0	1.5	2827	1
29	3m 固定节 (选配) 3m fixed mast (Optional)		2.0	2.0	3.0	1490	1
30	爬升框架 (选配) Climbing collar (Optional)		3.3	2.9	0.7	2314	3