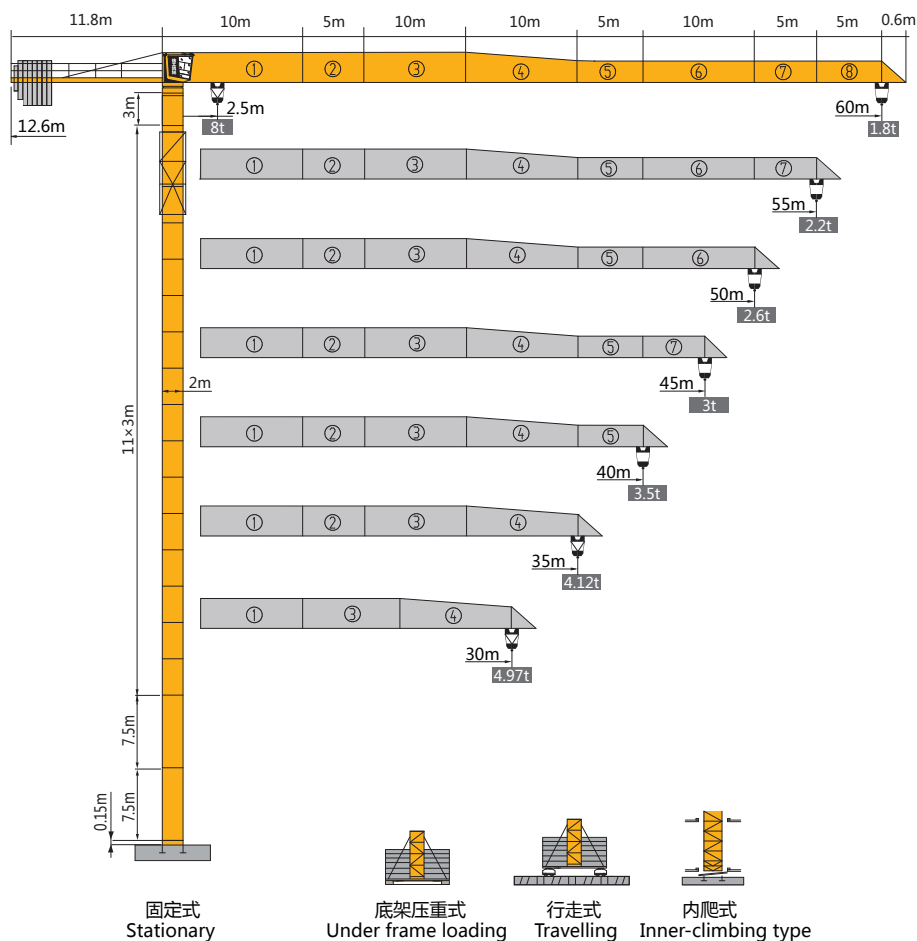




\* 可变换的其他安装方式与我们协商 Mounting possibilities Consult us.

平头系列 Topless





## 起重特性

## Load Diagrams

| 起重臂 jib | R <sub>min</sub> | R(C <sub>max</sub> ) | C <sub>max</sub> | 幅度 ( m ) / 起重量 ( kg ) |      |    |      |      |      | Range(m) / Loading (kg) |      |      |      |      |      |
|---------|------------------|----------------------|------------------|-----------------------|------|----|------|------|------|-------------------------|------|------|------|------|------|
| R(m)    | α                | m                    | m                | kg                    | 10   | 15 | 20   | 25   | 30   | 35                      | 40   | 45   | 50   | 55   | 60   |
| 60      |                  | 2.5                  | 32.14            | 4000                  | 4000 |    |      |      |      |                         | 3609 | 3063 | 2640 | 2303 | 1800 |
|         |                  | 2.5                  | 17.54            | 8000                  | 8000 |    | 6876 | 5300 | 4263 | 3529                    | 2983 | 2560 | 2223 | 1948 | 1720 |
| 55      |                  | 2.5                  | 34.13            | 4000                  | 4000 |    |      |      |      |                         | 3881 | 3300 | 2850 | 2492 | 2200 |
|         |                  | 2.5                  | 18.60            | 8000                  | 8000 |    | 7361 | 5684 | 4581 | 3801                    | 3220 | 2771 | 2412 | 2120 |      |
| 50      |                  | 2.5                  | 35.27            | 4000                  | 4000 |    |      |      |      |                         | 3435 | 2970 | 2600 |      |      |
|         |                  | 2.5                  | 19.20            | 8000                  | 8000 |    | 7637 | 5903 | 4763 | 3956                    | 3356 | 2891 | 2520 |      |      |
| 45      |                  | 2.5                  | 35.55            | 4000                  | 4000 |    |      |      |      |                         | 3469 | 3000 |      |      |      |
|         |                  | 2.5                  | 19.35            | 8000                  | 8000 |    | 7705 | 5957 | 4808 | 3995                    | 3389 | 2920 |      |      |      |
| 40      |                  | 2.5                  | 35.81            | 4000                  | 4000 |    |      |      |      |                         | 3500 |      |      |      |      |
|         |                  | 2.5                  | 19.49            | 8000                  | 8000 |    | 7769 | 6008 | 4850 | 4030                    | 3420 |      |      |      |      |
| 35      |                  | 2.5                  | 35.00            | 4000                  | 4000 |    |      |      |      |                         |      |      |      |      |      |
|         |                  | 2.5                  | 19.84            | 8000                  | 8000 |    | 7929 | 6135 | 4955 | 4120                    |      |      |      |      |      |
| 30      |                  | 2.5                  | 30.00            | 4000                  | 4000 |    |      |      |      |                         |      |      |      |      |      |
|         |                  | 2.5                  | 19.89            | 8000                  | 8000 |    | 7952 | 6153 | 4970 |                         |      |      |      |      |      |

起升高度

Hoisting Height

|    |  | L46S                                                                              |                                                                                   |                                                                                   |                                                                                   |
|----|--|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| 3m |  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
| 12 |  | -                                                                                 | -                                                                                 | -                                                                                 | 39                                                                                |
| 11 |  | 50                                                                                | 45.6                                                                              | -                                                                                 | 36                                                                                |
| 10 |  | 47                                                                                | 42.6                                                                              | 43.2                                                                              | 33                                                                                |
| 9  |  | 44                                                                                | 39.6                                                                              | 40.2                                                                              | 30                                                                                |
| 8  |  | 41                                                                                | 36.6                                                                              | 37.2                                                                              | 27                                                                                |
| 7  |  | 38                                                                                | 33.6                                                                              | 34.2                                                                              | 24                                                                                |
| 6  |  | 35                                                                                | 30.6                                                                              | 31.2                                                                              | 21                                                                                |
| 5  |  | 32                                                                                | 27.6                                                                              | 28.2                                                                              | 18                                                                                |
| 4  |  | 29                                                                                | 24.6                                                                              | 25.2                                                                              | 15                                                                                |
| 3  |  | 26                                                                                | 21.6                                                                              | 22.2                                                                              | 12                                                                                |
| 2  |  | 23                                                                                | 18.6                                                                              | 19.2                                                                              | 9                                                                                 |
| 1  |  | 20                                                                                | 15.6                                                                              | 16.2                                                                              | 6                                                                                 |
| 0  |  | 17                                                                                | 12.6                                                                              | 13.2                                                                              | 3                                                                                 |
|    |  |  |  |  |  |

# XGT6018BE-8 S1

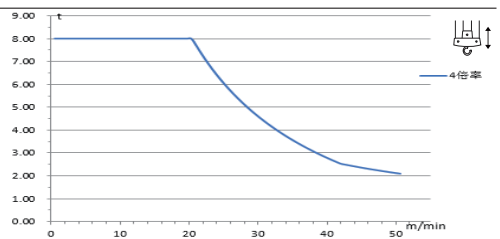
## 传动机构 Mechanisms

30KW (30LVF20CE)

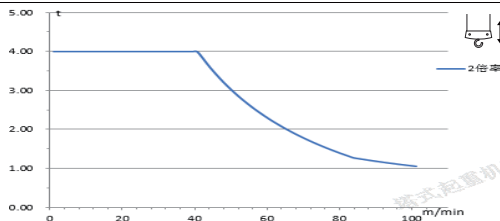
max.450m



|   | (t) | (m/min) |
|---|-----|---------|
| 1 | 8   | 0↔20    |
| 2 | 4   | 0↔31    |
| 3 | 2   | 0↔50    |



|   | (t) | (m/min) |
|---|-----|---------|
| 1 | 4   | 0↔40    |
| 2 | 2   | 0↔62    |
| 3 | 1   | 0↔100   |



| 传动机构<br>Mechanisms                                              | 图例<br>Legend | 型号<br>Model | 速度 ( m/min )<br>Speed |       | 起重量 ( t )<br>Hoist Weight | 容绳量 ( m )<br>Rope Capacity | 功率 ( kW )<br>Power |
|-----------------------------------------------------------------|--------------|-------------|-----------------------|-------|---------------------------|----------------------------|--------------------|
| 起 升<br>Hoisting                                                 |              | 30LVF20CE   |                       | 0-40  | 4                         | 450<br>>450*               | 30                 |
|                                                                 |              |             |                       | 0-62  | 2                         |                            |                    |
|                                                                 |              |             |                       | 0-100 | 1                         |                            |                    |
|                                                                 |              |             |                       | 0-20  | 8                         |                            |                    |
|                                                                 |              |             |                       | 0-31  | 4                         |                            |                    |
|                                                                 |              |             |                       | 0-50  | 2                         |                            |                    |
| 变 幅<br>Trolleying                                               |              | 40BP65E     | 0-50m/min             |       |                           |                            | 4                  |
| 回 转<br>Slewing                                                  |              | 8RVF        | 0-0.6r/min            |       |                           |                            | 2×4                |
| 行 走<br>Travelling                                               |              | RT          | 0-25m/min             |       |                           |                            | 4×4                |
| 电 源 Main Supply                                                 |              |             |                       |       |                           | ~ 380V (±10%) 50Hz         |                    |
| 总功率 ( 不含顶升和行走 ) Gross Power (Excluding climbing and travelling) |              |             |                       |       |                           |                            | 42kW               |

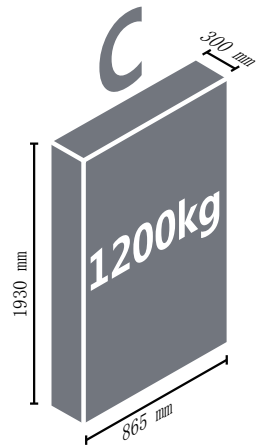
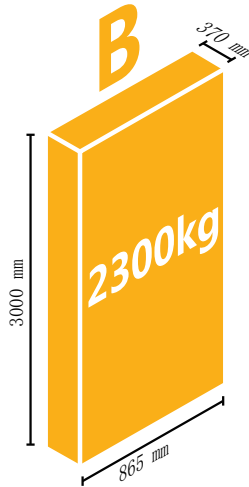
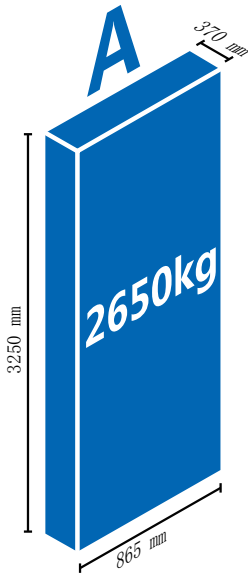
\* 如需其他配置, 请与我们联系。 For other configuration, consult us please.

此样本所列技术参数不受法律约束, 具体请详见相应产品说明书。

These brochure of specifications and data are not legally binding, specific instructions please based on our product manuals.

## 配重配置

## Counter-jib Ballast



| 配重配置<br>Counter-jib Ballast                                                             |                                                                                         |                                                                                          | A-B-C |   |   |
|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-------|---|---|
|  (m) |  (m) |  (kg) | A     | B | C |
| 60                                                                                      | 12.6                                                                                    | 19400                                                                                    | 6     | 1 | 1 |
| 55                                                                                      | 12.6                                                                                    | 18200                                                                                    | 6     | 1 | 0 |
| 50                                                                                      | 12.6                                                                                    | 17100                                                                                    | 6     | 0 | 1 |
| 45                                                                                      | 12.6                                                                                    | 15900                                                                                    | 6     | 0 | 0 |
| 40                                                                                      | 12.6                                                                                    | 14450                                                                                    | 5     | 0 | 1 |
| 35                                                                                      | 12.6                                                                                    | 13250                                                                                    | 5     | 0 | 0 |
| 30                                                                                      | 12.6                                                                                    | 11450                                                                                    | 3     | 1 | 1 |

# XGT6018BE-8 S1

运输方案

Transport

 60m

 50m

 × 3






3: 3×17.5m

 × 5

5: 40米高柜 (40hq)






运输单元

Packing List

| No. | 名称<br>Description | 形状<br>Sketch                                                                        | L(m)  | B(m) | H (m) | 单件重量<br>Weight Per<br>piece (kg) | 数量<br>Nb. |
|-----|-------------------|-------------------------------------------------------------------------------------|-------|------|-------|----------------------------------|-----------|
| 1   | 臂节一<br>Jib 1      |    | 10.23 | 1.1  | 2.43  | 1829                             | 1         |
| 2   | 臂节二<br>Jib 2      |   | 5.22  | 1.1  | 2.27  | 767                              | 1         |
| 3   | 臂节三<br>Jib 3      |  | 10.19 | 1.1  | 2.27  | 1207                             | 1         |
| 4   | 臂节四<br>Jib 4      |  | 10.17 | 1.1  | 2.21  | 940                              | 1         |
| 5   | 臂节五<br>Jib 5      |  | 5.17  | 1.1  | 1.71  | 407                              | 1         |
| 6   | 臂节六<br>Jib 6      |  | 10.15 | 1.1  | 1.69  | 644                              | 1         |







## 运输单元

## Packing List

| No. | 名称<br>Description          | 形状<br>Sketch                                                                        | L(m)  | B(m) | H (m) | 单件重量<br>Weight Per<br>piece (kg) $\pm 5\%$ | 数量<br>Nb. |
|-----|----------------------------|-------------------------------------------------------------------------------------|-------|------|-------|--------------------------------------------|-----------|
| 7   | 臂节七<br>Jib 7               |    | 5.13  | 1.1  | 1.66  | 269                                        | 1         |
| 8   | 臂节八<br>Jib8                |    | 5.13  | 1.1  | 1.65  | 238                                        | 1         |
| 9   | 臂头<br>Jib end              |    | 0.6   | 1.1  | 2.06  | 66                                         | 1         |
| 10  | 平衡臂臂节<br>Counter jib       |    | 11.83 | 1.22 | 0.61  | 2185                                       | 1         |
| 11  | 塔顶<br>Tower top            |   | 1.85  | 1.13 | 2.33  | 984                                        | 1         |
| 12  | 起升机构<br>Hoisting mechanism |  | 1.43  | 1.57 | 0.95  | 1400                                       | 1         |

## 运输单元




## Packing List

| No. | 名称<br>Description               | 形状<br>Sketch                                                                        | L(m) | B(m) | H (m) | 单件重量<br>Weight Per<br>piece(kg) $\pm 5\%$ | 数量<br>Nb. |
|-----|---------------------------------|-------------------------------------------------------------------------------------|------|------|-------|-------------------------------------------|-----------|
| 13  | 变幅机构<br>Trolleying<br>mechanism |    | 1.2  | 0.6  | 0.64  | 276                                       | 1         |
| 14  | 回转机构<br>Rotating<br>mechanism   |    | 0.6  | 0.38 | 0.38  | 172                                       | 2         |
| 15  | 司机室<br>Cab                      |    | 2.3  | 1.3  | 2.1   | 500                                       | 1         |
| 16  | 回转总成<br>Rotary assembly         |    | 1.85 | 1.91 | 1.35  | 1855                                      | 1         |
| 17  | 载重小车<br>Load trolley            |   | 1.58 | 1.39 | 0.82  | 228                                       | 1         |
| 18  | 吊钩<br>Hook                      |  | 0.96 | 0.4  | 1.45  | 311                                       | 1         |







## 运输单元

## Packing List

| No. | 名称<br>Description     | 形状<br>Sketch                                                                       | L(m) | B(m) | H (m) | 单件重量<br>Weight Per<br>piece (kg) $\pm 5\%$ | 数量<br>Nb. |
|-----|-----------------------|------------------------------------------------------------------------------------|------|------|-------|--------------------------------------------|-----------|
| 19  | 特殊节<br>Special mast   |   | 2.2  | 2.2  | 3.2   | 1295                                       | 1         |
| 20  | 爬升架<br>Climbing frame |   | 2.3  | 2.2  | 7.0   | 1859                                       | 1         |
| 21  | 基础节 1<br>Basic mast 1 |  | 1.6  | 1.6  | 7.5   | 4083                                       | 1         |







## 运输单元

## Packing List

| No. | 名称<br>Description                          | 形状<br>Sketch                                                                        | L(m) | B(m) | H (m ) | 单件重量<br>Weight Per<br>piece(kg) $\pm 5\%$ | 数量<br>Nb. |
|-----|--------------------------------------------|-------------------------------------------------------------------------------------|------|------|--------|-------------------------------------------|-----------|
| 22  | 基础节 2<br>Basic mast 2                      |    | 1.6  | 1.6  | 7.5    | 3019                                      | 1         |
| 23  | 标准节<br>Mast                                |    | 1.6  | 1.60 | 3.0    | 1140                                      | 11        |
| 24  | 支腿<br>Outrigger                            |   | 0.6  | 0.6  | 1.19   | 240                                       | 4         |
| 25  | 底架节 (选配)<br>Underframe joint<br>(Optional) |  | 2.3  | 2.5  | 4.33   | 2715                                      | 1         |

## 运输单元

## Packing List

| No. | 名称<br>Description                                          | 形状<br>Sketch                                                                        | L(m) | B(m) | H (m) | 单件重量<br>Weight Per<br>piece (kg) $\pm 5\%$ | 数量<br>Nb. |
|-----|------------------------------------------------------------|-------------------------------------------------------------------------------------|------|------|-------|--------------------------------------------|-----------|
| 26  | 半梁 (选配)<br>Halfbeam<br>(Optional)                          |    | 5.1  | 1.8  | 0.66  | 1031                                       | 2         |
| 27  | 斜撑杆 (选配)<br>Diagonal Strut<br>(Optional)                   |    | 3.2  | 0.25 | 0.22  | 205                                        | 4         |
| 28  | 1.5m 内爬节 (选配)<br>1.5m Inner<br>Climbing mast<br>(Optional) |    | 1.6  | 1.6  | 1.5   | 790                                        | 1         |
| 29  | 3m 固定节 (选配)<br>3m fixed mast<br>(Optional)                 |   | 1.6  | 1.6  | 3.0   | 1305                                       | 2         |
| 30  | 支撑梁总成 (选配)<br>Support beam<br>(Optional)                   |  | 2.4  | 1.63 | 1.15  | 602                                        | 1         |
| 31  | 爬升框架 (选配)<br>Climbing collar<br>(Optional)                 |  | 2.61 | 2.38 | 0.5   | 1219                                       | 3         |